



RKLITE

Since 1961



MADE IN INDIA

INTERIOR | EXTERIOR 2021- 22





## ABOUT US

The Rajkamal Trading Corporation was established in 1961 in India when they set up their factory located in Mumbai. Within a very short period, the company emerged as one of the leading manufacturers of an extremely wide range of lighting fixtures that included chandeliers, table lamps, pedestal lamps, wall lamps, recessed lights and custom made fittings.

Through stringent quality control, & with the help of an in-house design studio, these products became widely acclaimed for their unparalleled design aesthetics and their fail-safe durability.

In 1971, the Company started exporting its products in a very major way. From then onward, growth at the Rajkamal Trading Corporation took place at an even faster rate. Today, these products have the pride of place at leading institutions and establishments all over Asia and The Middle East.

Some discerning clients who have always sourced their lighting fixture requirements from the Rajkamal Trading Corporation include the Taj Group of Hotels, The Oberoi Group of Hotels, The Leela Kempinsky Group of Hotels, The Centaur Group of Hotels, Sheraton Hotels, & almost all the leading five-star hotels in India & several in Dubai, Sharjah and Russia.

Through years of efforts, Rajkamal Started manufacturing outdoor landscape fixtures in 2010. The product range includes a wide range of flexible LED strips, matching innovative profiles, exterior lighting products like Inground, downlight, step light, ceiling and wall-mounted, bollards, post tops, for commercial and industrial buildings, retail, hotels, restaurants, etc.

All the products are developed by In-house Team. Our extensive range of products, the fast delivery times, the outstanding price-performance ratio and the option of manufacturing and packaging according to your requirements make us your ideal partner.

## **GROUND RECESSED**

PAGE 20-25




TERRA ING 40




TERRA ING 55




TERRA ING 55 INT



TERRA ING 40 GC



TERRA ING 55 GC



TERRA ING 55 INT GC



TERRA ING 85 LD



TEERA ING 85 D3



TEERA ING 140



TEERA ING 150




TERRA ING 140-ASY




TERRA ING 150-ASY

## **DOWNLIGHT FIXTURES**

PAGE 26-27



TYLO DL 40



TYLO DL 55



TYLO DL 85-D3

## **STEP LIGHT FIXTURES**

PAGE 28-33



TERRA SL 40 GC



TERRA SL 55 GC



TERRA SL INT 55 GC



TERRA SL 40 ASY



TERRA SL 55 ASY



TERRA SL INT 55 ASY



TERRA SL 140 ASY



TERRA SL 150 ASY



TERRA BLADE 55-R



TERRA BLADE 55-S

## **WALL MOUNT FIXTURES**

PAGE 34-39



BOXY WM 39



BOXY WM-39UD



BOXY WM 75 D3



BULLET WM 61D-HP



BULLET WM 61-D3



BULLET WM 61D COB



BULLET WM 61UD HP



BULLET WM 61UD-D3



BULLET 88 HP



BULLET 88 COB

## **CEILING MOUNT FIXTURES**

PAGE 40-43



BOXY CM 75 D3



BULLET CM 61 D3



BULLET CM 61 COB



BULLET CM 64 COB



BULLET CM 88 COB

**CELLING PENDANT FIXTURES**

PAGE 44-485



BOXY CP 75 D3



BULLET CP 61 D3



BULLET CP 61 COB



BULLET CP 64 COB



BULLET CP 88 COB

**PROJECTORS**

PAGE 46-55



CIELO SP 32



CIELO SP 64 D3



CIELO SP 64 COB



CIELO SP 118



LUGAR SP 41




LUGAR SP 61 COB



LUGAR SP 64 D3



LUGAR SP 64 COB



LUGAR SP 64 HP



LUGAR SP 75 HP



LUGAR SP 75 COB




LUGAR SP 88 COB




LUGAR SP 88 HP

**BOLLARDS**

PAGE 56-69




CAMPA



FUNGO



DISK 1



DISK 2



MUSHO



FOCUS 1




FOCUS 2



BAMBOO 1



BAMBOO 2



NARROWLINE



MONO



ANGLE



SETTE



MODELLO R



SOLE

**POST TOP**

PAGE 70-83



CILLINDRO



CILLINDRO TWIN




CAMPA PT




ORLUNA PT



MOON RING



MUSHO



ANGLE PT




SETTE



ZIGZAG



BAMBOO PT



COLUMN




PILLAR 110



PILLAR 170



LUGAR 4




LUGAR 6




LUGAR TWIRL

**POLES**


PAGE 84-87



SPR- 30/40



SPSQ - 30/40



STPR- 30/40/50/60

**LED STRIP**

PAGE 88-89



NASTRO 120



NASTRO 120 IP

**LED STRIP - PROFILES**

PAGE 90-91



CORNER S



CORNER R




ROUND 30



FLEX




CLOSET




WALL UP/DOWN




FLAT ( SURFACE )



DEEP ( SURFACE )



FLAT ( RECESSED )




DEEP ( RECESSED )

**GLOW FLEX**


PAGE 92-97




GLOW FLEX TV-1010



GLOW FLEX TV-2515




GLOW FLEX SV-0612



GLOW FLEX SV-1020



GLOW FLEX SV-1220



GLOW FLEX SV- 1615




GLOW FLEX SV-1207




GLOW FLEX SV-1212

**ALULINE IP**

PAGE 98-99




ALULINE IP 67




ALULINE IP 67

**ALULINE**


PAGE 100-103



ALULINE CR 4472




ALULINE CR 6195



ALULINE CR 7995




ALULINE CP 4795




ALULINE CP 6595

**ALULINE SYSTEM**


PAGE 104-105




ALULINE CR 6195



ALULINE CR 7995




ALULINE CP 4795




ALULINE CP 6595

**ALULINE SYSTEM  
ACCESSORIES**

PAGE 104-105



CRL



CR PLUS



CR Y




CRT



CS/CP L



CS/CP PLUS



CS/CP Y



CS/CP T

**ALU SHAPES**


PAGE 110-113



RING



MOON 300



ARC

**COPP**

PAGE 114-117




COPP WM




COPP WM UD



COPP WM ADJ



COPP PD



COPP Lantern

**AQUA**

PAGE 118-121




AQUA 55 S



AQUA 55 L



AQUA 125



AQUA 41



AQUA 100

LED expo  
MUMBAI  
CAFETERIA ↑  
WASHROOM ↓



- Indoor
- Outdoor
- Deco



**SOLID CONSTRUCTION**

- Solid aluminum body.
- Extra safety Impact resistant, toughened glass.
- High grade brass anodized German Glass.
- High grade aerospace Silicon based Fluoride cable to withstand any weather condition.
- Stainless steel Screws.

**TECHNICAL INTELLIGENCE**

- High grade optical system.
- Cree / Philips / Bridgelux LED's.
- Extra clear glass to increase efficiency of the fixture.
- Constant voltage operating system.
- Surge protection.
- High voltage protection.

INDOOR  
OUTDOOR  
DECORATIVE







# RKLITE

*Since 1961*

Indoor / Outdoor & Decorative






RKLIT

Since 1985

- ◆ INDOOR
- ◆ OUTDOOR
- ◆ DECORATIVE






# RKLITE

Since 1961

● Indoor

● Outdoor

● Decorative

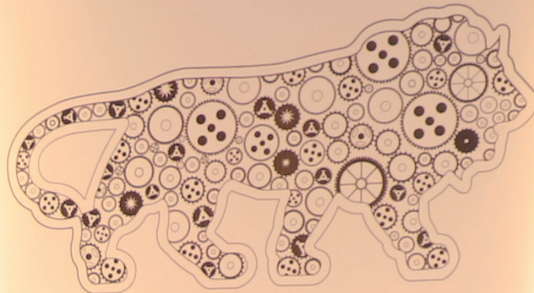

**MAKE IN INDIA**

## SOLID CONSTRUCTION


- Solid aluminum body.
- Extra safety Impact resistant, toughened glass.
- High grade brass nickel plated German gland.
- High grade neoprene Silicon based O-ring cable to withstand any weather conditions.
- Stainless steel Screws.


## TECHNICAL INTELIIGENCE

- High grade optical system.
- Cree / Citizen / Bridgelux LED's.
- Extra clear glass to increase efficiency of the fixture.
- Constant voltage operating system.
- Surge protection.
- High voltage protection.

## SPECIAL FEATURES

- "CoroSafe" high grade Anodizing.
- "Duracoat" Double layer body coating to withstand corrosion.
- "weather protect" outdoor rated special powder coating.
- "Capillary protect System" anti-capillary system to protect any water ingress from cable joints.



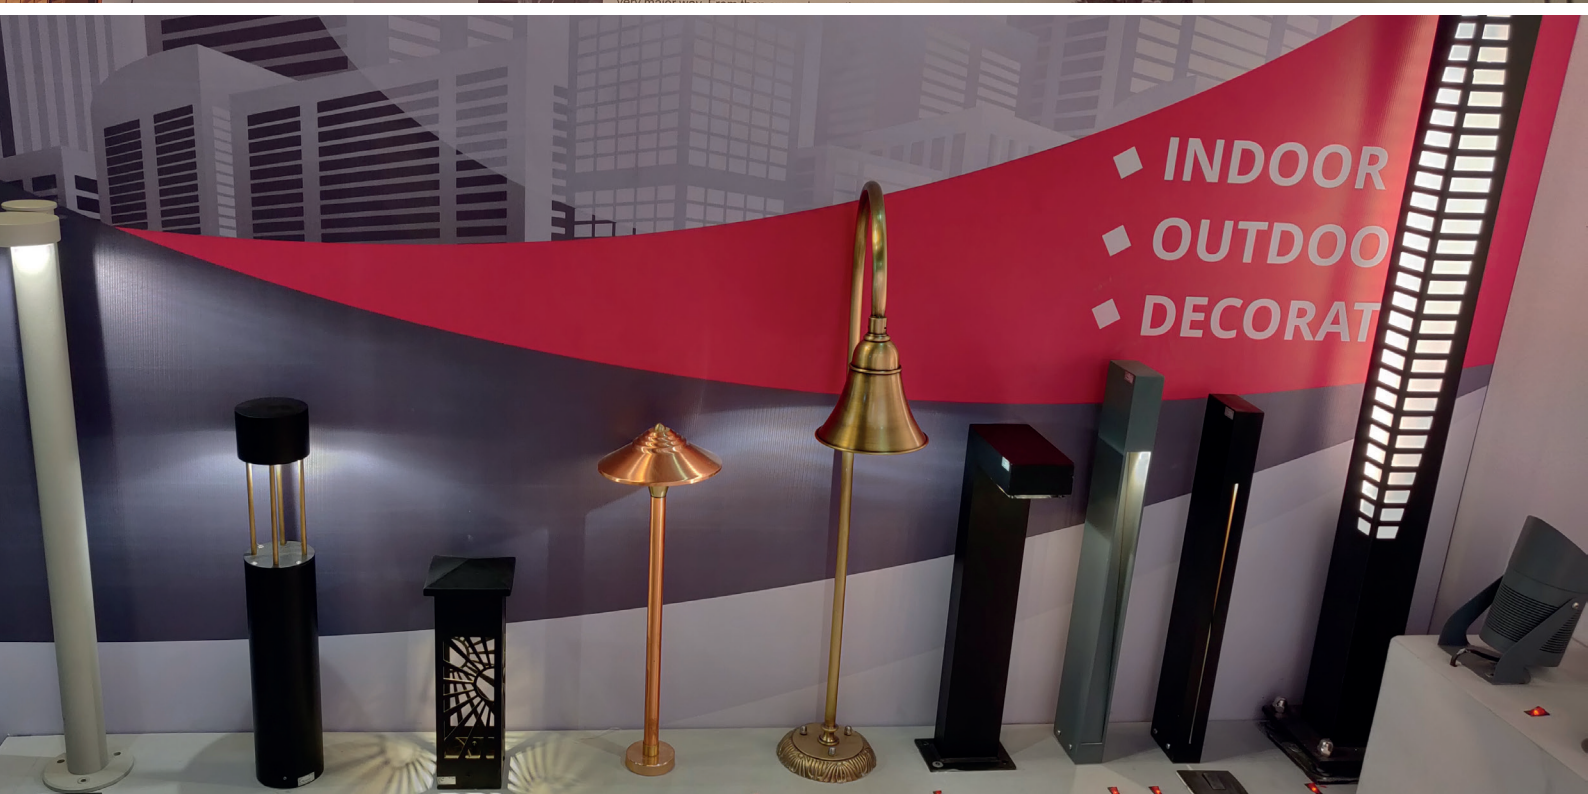



RKLITE

Since 1961





**OUR PARTNERS**

**LEDiL**<sup>®</sup>

**KHATOD**

bridgelux<sup>®</sup>  
*Bridging Light and Life™*

**CREE** ⇄

**CITIZEN**

**OSRAM**

**MW**  
MEAN WELL

**FULHAM**<sup>®</sup>  
*Harness the Horsepower*

**PYROTECH**  
CREATIVE LED LIGHTING








Recessed IP67 inground uplighter available in various optics from narrow to wide flood ideal for lighting up application like sidewalks, columns, gardens, pathways, etc.



• Protection against water  
 • Infiltrations through cables.

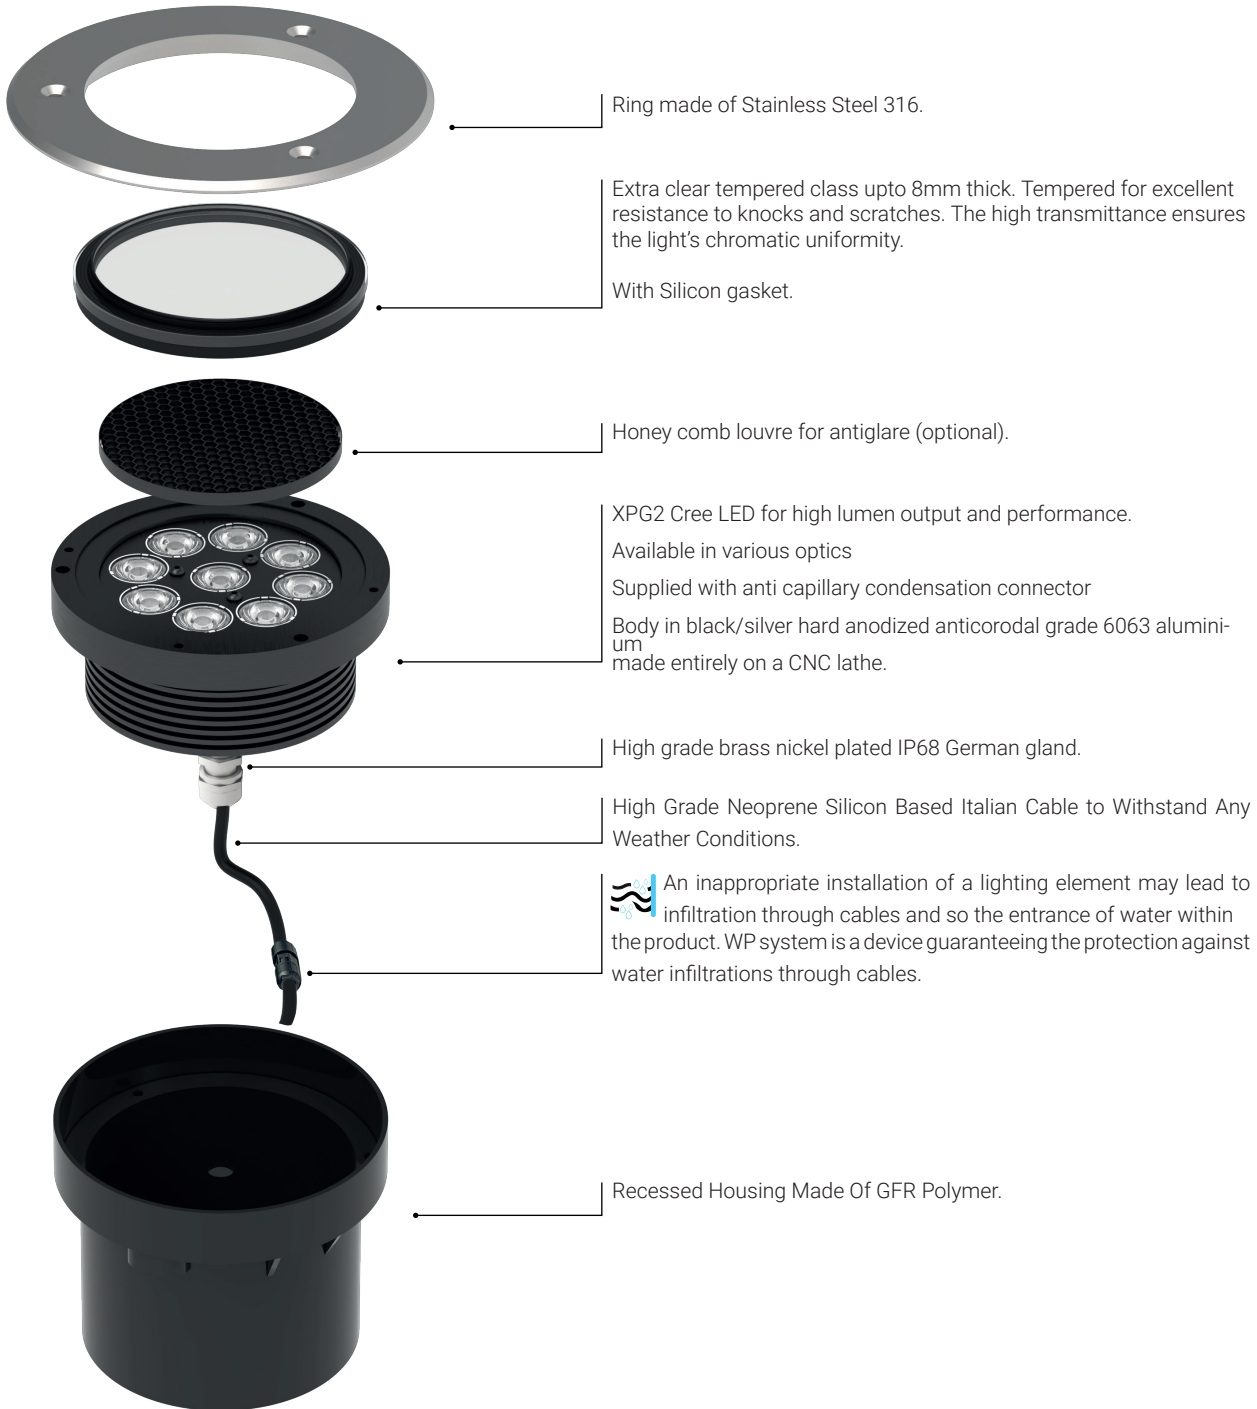





Grand Hyatt Lulu, Kochi

## FEATURES

- Excellent Corrosion Resistant Low Copper Solid Aluminium Body.
- SS316 Faceplate.
- Extra Safety Impact Resistant, Toughened Glass.
- Extra Clear Glass To Increase Efficiency of The Fixture.
- High Grade Silicon Gasket- Heat & Cold Resistant.
- High Grade Brass Nickel Plated IP68 German Gland
- High Grade Neoprene Silicon Based Italian Cable to Withstand Any Weather Conditions .
- High Efficiency Optical System.
- Multiple Accessories Support
- Cree LED 50000\* hrs Life
- Recessed Housing Made Of GFR Polymer.
- "Coro Safe" High Grade Anodizing.
- "Capillary Protect System" Anti-Capillary System To Protect Any Water Ingress From Cable Joints.
- "Long Life" Thermal Management.




## OPTICS

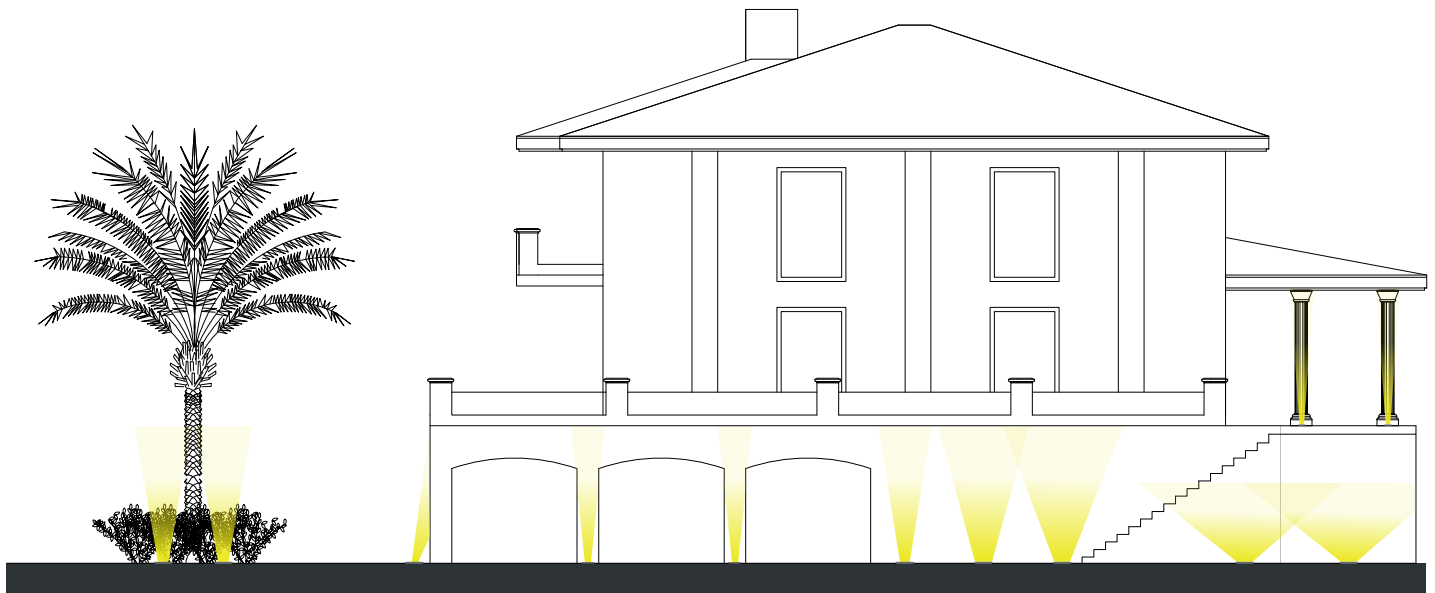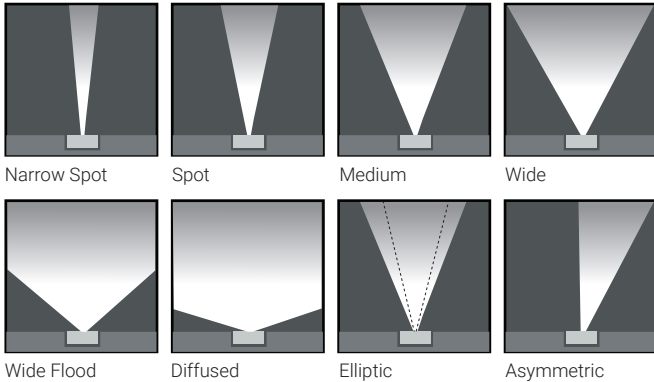


### TERRA ING 40



Dimension (mm) :



Accessories



Order Code : Terra\_ING\_40\_1\_80\_NS\_27\_SS\_CC\_HL-20


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	ING	40	1 - 1W (126lm) 1.5 - 1.5W (180lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10°, M - 24° W - 40°, WF - 60° EL - 30 x 65° DF - Diffused AS - Asymmetric	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel 316	CC - Constant Current Driver (3V, 350mA/500mA)	HL - 20



### TERRA ING 55



Dimension (mm) :

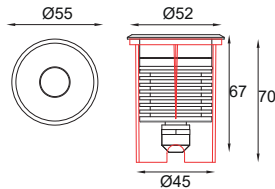

Accessories



Order Code : Terra\_ING\_55\_1\_80\_NS\_27\_SS\_CC\_HL-20


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	ING	55	1 - 1W (126lm) 1.5 - 1.5W (180lm) 2 - 2W (252lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10°, M - 24° W - 40°, WF - 60° EL - 30 x 65° DF - Diffused AS - Asymmetric	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel 316	CC - Constant Current Driver (3V, 500mA/700mA)	HL - 20



### TERRA ING 55 INT



Dimension (mm) :

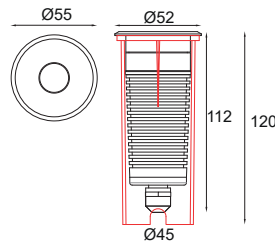

Accessories



Order Code : Terra\_ING\_55 INT\_3\_80\_NS\_27\_SS\_AC-230\_HL-20


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	ING	55 INT	2 - 2.5 (350lm) 3 - 3W (252lm) 5 - 5.5W (770lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10°, M - 24° W - 40°, WF - 60° EL - 30 x 65° DF - Diffused AS - Asymmetric	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel 316	AC-230V 24V DC	HL-20




### TERRA ING 40-GC



Dimension (mm) :



Accessories



Order Code : Terra\_ING\_40-GC\_1\_80\_NS\_27\_SS\_CC


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	ING	40-GC	1 - 1W (126lm) 1.5 - 1.5W (180lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10°, M - 24° W - 40°, WF - 60° DF - Diffused	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel	CC - Constant Current Driver (3V, 350mA/500mA)	HL - 20



### TERRA ING 55-GC



Dimension (mm) :

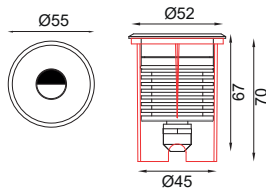

Accessories



Order Code : Terra\_ING\_55-GC\_1\_80\_NS\_27\_SS\_CC


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	ING	55-GC	1 - 1W (126lm) 1.5 - 1.5W (180lm) 2 - 2W (252lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10°, M - 24° W - 40°, WF - 60° DF - Diffused	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel	CC - Constant Current Driver (3V, 500mA/700mA)	-



### TERRA ING 55 INT-GC



Dimension (mm) :

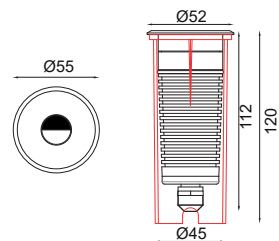

Accessories



Order Code : Terra\_ING\_55 INT-GC\_1\_80\_NS\_27\_SS\_AC\_230


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	ING	55 INT-GC	2 - 2.5 (350lm) 3 - 3W (252lm) 5 - 5.5W (770lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10°, M - 24° W - 40°, WF - 60° DF - Diffused	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel	230-230V AC 24-24V DC	-




### TERRA ING 85 LD



Dimension (mm) :

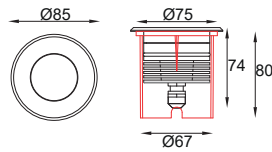

Accessories



Order Code : Terra\_ING\_85-LD\_4.5\_80\_NS\_27\_SS\_CC\_HL-48


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	ING	85 - LD	4.5 - 4.5W (540lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° SP - 18° WF - 54° DF - Diffused	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel 316	CC - Constant Current Driver (9V, 500mA)	HL - 48




### TERRA ING 85 D3



Dimension (mm) :

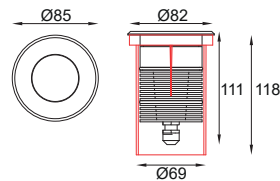

Accessories



Order Code : Terra\_ING\_85-D3\_6\_80\_NS\_27\_SS\_CC\_HL-48


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	ING	85 - D3	6 - 6W (720lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° SP - 18° WF - 54° DF - Diffused	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel 316	CC - Constant Current Driver (9V, 700mA) 24-24V DC	HL - 48




### TERRA ING 140



Dimension (mm) :

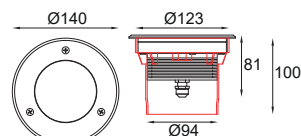

Accessories



Order Code : Terra\_ING\_140\_12\_80\_NS\_27\_SS\_CC\_HL-77


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	ING	140	12 - 12W (1512lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10°, M - 24° W - 40°, WF - 60° EL - 30 x 65° DF - Diffused	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel 316	CC - Constant Current Driver (18V, 700mA)	HL - 77




### TERRA ING 150



Dimension (mm) :

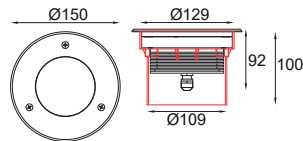

Accessories



Order Code : Terra\_ING\_150\_18\_80\_NS\_27\_SS\_CC\_HL-87


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	ING	150	18 - 18W (2268lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10°, M - 24° W - 40°, WF - 60° EL- 30 x 65° DF - Diffused	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel 316	CC - Constant Current Driver (20V, 700mA)	HL - 87



### TERRA ING 140-ASY



Dimension (mm) :

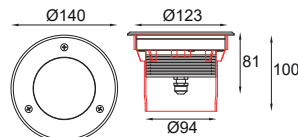

Accessories



Order Code : Terra\_ING\_140-ASY\_6\_80\_ASY\_27\_SS\_CC


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	ING	140-ASY	6 - 6W (650lm) 8 - 8W (880lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	ASY - Asymmetric	27 - 2700K 30 - 3000K 40 - 4000K	SS- Stainless Steel	CC - Constant Current Driver (12V, 700mA)	-



### TERRA ING 150-ASY



Dimension (mm) :

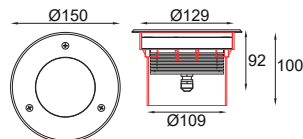

Accessories



Order Code : Terra\_ING\_150\_12\_80\_ASY\_27\_SS\_CC

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	ING	150-ASY	12 - 12W (1320lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	ASY - Asymmetric	27 - 2700K 30 - 3000K 40 - 4000K	SS- Stainless Steel	CC - Constant Current Driver (18V, 700mA)	-







## FEATURES


- Excellent Corrosion Resistant Low Copper Solid Aluminium Body.
- SS316 Faceplate.
- Extra Safety Impact Resistant, Toughened Glass.
- Extra Clear Glass To Increase Efficiency of The Fixture.
- High Grade Silicon Gasket- Heat & Cold Resistant.
- High Grade Brass Nickel Plated IP68 German Gland
- High Grade Neoprene Silicon Based Italian Cable to Withstand Any Weather Conditions .
- High Efficiency Optical System.
- Multiple Accessories Support
- Cree LED 50000\* hrs Life
- Recessed Housing Made Of GFR Polymer.
- "Coro Safe" High Grade Anodizing.
- "Capillary Protect System" Anti-Capillary System To Protect Any Water Ingress From Cable Joints.
- "Long Life" Thermal Management.



## OPTICS



Spot Medium Flood

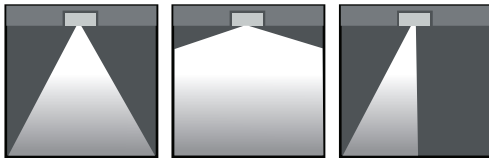

Wide Flood Diffused Asymmetric




2700K



3000K




4000K

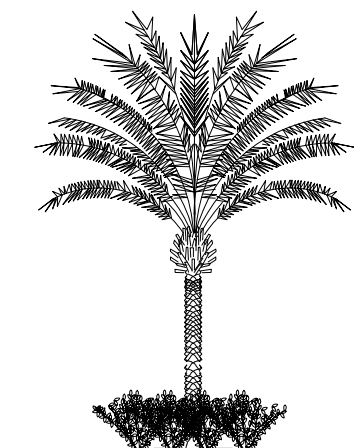

### TYLO DL 40



Dimension (mm) :

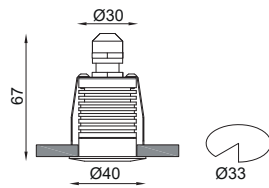

Accessories



HL - 20  
(Hexcell Louvre)

Order Code : Tylo\_DL\_40\_1\_8\_SP\_27\_SS\_CC\_HL-20


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Tylo	DL	40	1 - 1W (120lm) 1.5 - 1.5W (180lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10°, M - 24° W - 40°, WF - 60° DF - Diffused EL - 30 x 65° AS - Asymmetric	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel	CC - Constant Current Driver (3V, 350mA/500mA)	HL - 20



### TYLO DL 55



Dimension (mm) :

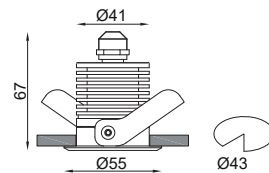

Accessories



HL - 20  
(Hexcell Louvre)

Order Code : Tylo\_DL\_55\_1\_80\_S\_27\_SS\_CC\_HL-20


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Tylo	DL	55	1 - 1W (120lm) 1.5 - 1.5W (180lm) 2 - 2W (240lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10°, M - 24° W - 40°, WF - 60° EL - 30 x 65° DF - Diffused AS - Asymmetric	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel	CC - Constant Current Driver (3V, 350mA/500mA/700mA)	HL - 20



### TYLO DL 85-D3



Dimension (mm) :

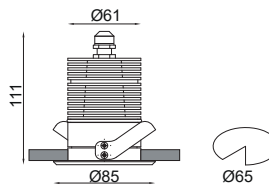

Accessories



HL - 48  
(Hexcell Louvre)

Order Code : Tylo\_DL\_85-D3\_6\_80\_SP\_27\_SS\_CC\_HL-48

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Tylo	DL	85 - D3	6 - 6W (720lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	S - 10° M - 18° WF - 54° DF - Diffused	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel	CC - Constant Current Driver (9V, 700mA)	HL - 48




**FEATURES**

- Excellent Corrosion Resistant Low Copper Solid Aluminium Body.
- SS316 Faceplate.
- Extra Safety Impact Resistant, Toughened Glass.
- Extra Clear Glass To Increase Efficiency of The Fixture.
- High Grade Silicon Gasket- Heat & Cold Resistant.
- High Grade Brass Nickel Plated IP68 German Gland
- High Grade Neoprene Silicon Based Italian Cable to Withstand Any Weather Conditions .
- High Efficiency Optical System.
- Multiple Accessories Support
- Cree LED 50000\* hrs Life
- Recessed Housing Made Of GFR Polymer.
- "Coro Safe" High Grade Anodizing.
- "Capillary Protect System" Anti-Capillary System To Protect Any Water Ingress From Cable Joints.
- "Long Life" Thermal Management.




**OPTICS**

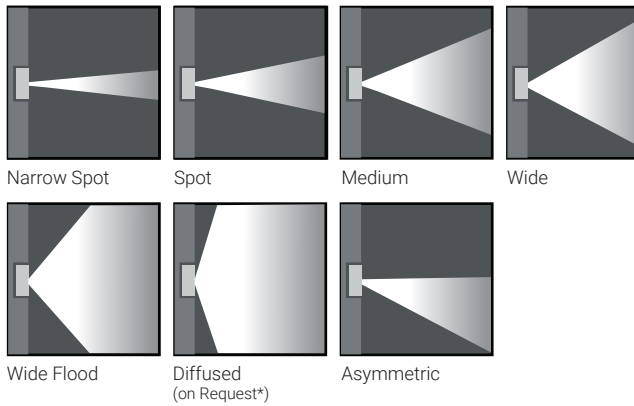

### TERRA SL 40-GC

Dimension (mm) :

Accessories

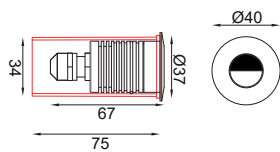

Order Code : Terra\_SL\_40-GC\_1\_80\_NS\_27\_SS\_CC


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	SL	40-GC	1 - 1W (126lm) 1.5 - 1.5W (180lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10°, M - 24° W - 40° WF - 60° DF - Diffused	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel	CC - Constant Current Driver (3V, 350mA/500mA)	-



### TERRA SL 55-GC

Dimension (mm) :

Accessories

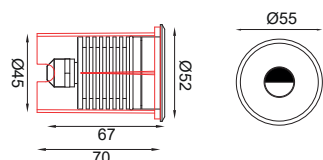

Order Code : Terra\_SL\_55-GC\_1\_80\_NS\_27\_SS\_CC


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	SL	55-GC	1 - 1W (126lm) 1.5 - 1.5W (180lm) 2 - 2W (252lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10°, M - 24° W - 40° WF - 60° DF - Diffused	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel	CC - Constant Current Driver (3V, 350mA/500mA/700mA)	-



### TERRA SL 55 INT-GC

Dimension (mm) :

Accessories

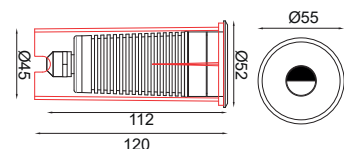

Order Code : Terra\_SL\_55 INT-GC\_1\_80\_NS\_27\_SS\_CC


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	SL	55 INT-GC	2 - 2.5 (350lm) 3 - 3W (252lm) 5 - 5.5W (770lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10°, M - 24° W - 40° WF - 60° DF - Diffused	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel	CC - Constant Current Driver (3V, 350mA)	-



### TERRA SL 40-ASY

Dimension (mm) :

Accessories

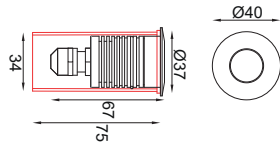

Order Code : Terra\_SL\_40-ASY\_1\_80\_ASY\_27\_SS\_CC


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	SL	40-ASY	1 - 1W (126lm) 1.5 - 1.5W (180lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	ASY - Asymmetric	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel	CC - Constant Current Driver (3V, 350mA/500mA)	-



### TERRA SL 55-ASY

Dimension (mm) :

Accessories

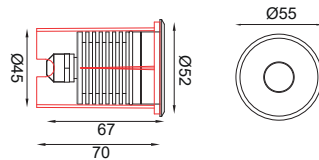

Order Code : Terra\_SL\_55-ASY\_1\_80\_ASY\_27\_SS\_CC


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	SL	55-ASY	1 - 1W (126lm) 1.5 - 1.5W (180lm) 2 - 2W (252lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	ASY - Asymmetric	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel	CC - Constant Current Driver (3V, 350mA/500mA/700mA)	-



### TERRA SL 55 INT-ASY

Dimension (mm) :

Accessories

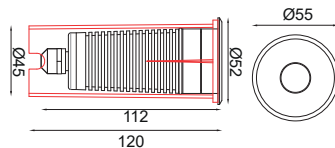

Order Code : Terra\_SL\_55 INT-ASY\_1\_80\_ASY\_27\_SS\_AC\_230


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	SL	55 INT-ASY	2 - 2.5 (350lm) 3 - 3W (252lm) 5 - 5.5W (770lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	ASY - Asymmetric	27 - 2700K 30 - 3000K 40 - 4000K	SS - Stainless Steel	AC-230V 24V DC	-



### TERRA SL 140-ASY

Dimension (mm) :

Accessories

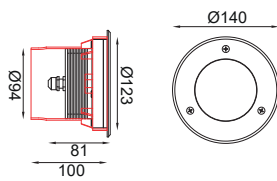

Order Code : Terra\_SL\_140-ASY\_6\_80\_ASY\_27\_SS\_CC


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	SL	140-ASY	6 - 6W (650lm) 8 - 8W (880lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	ASY - Asymmetric	27 - 2700K 30 - 3000K 40 - 4000K	SS- Stainless Steel	CC - Constant Current Driver (12V, 700mA)	-



### TERRA SL 150-ASY


Dimension (mm) :

Accessories

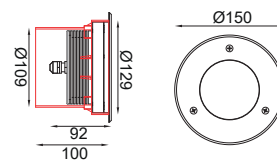


Order Code : Terra\_SL\_150\_12\_80\_ASY\_27\_SS\_CC

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	SL	150-ASY	12 - 12W (1320lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	ASY - Asymmetric	27 - 2700K 30 - 3000K 40 - 4000K	SS- Stainless Steel	CC - Constant Current Driver (18V, 700mA)	-


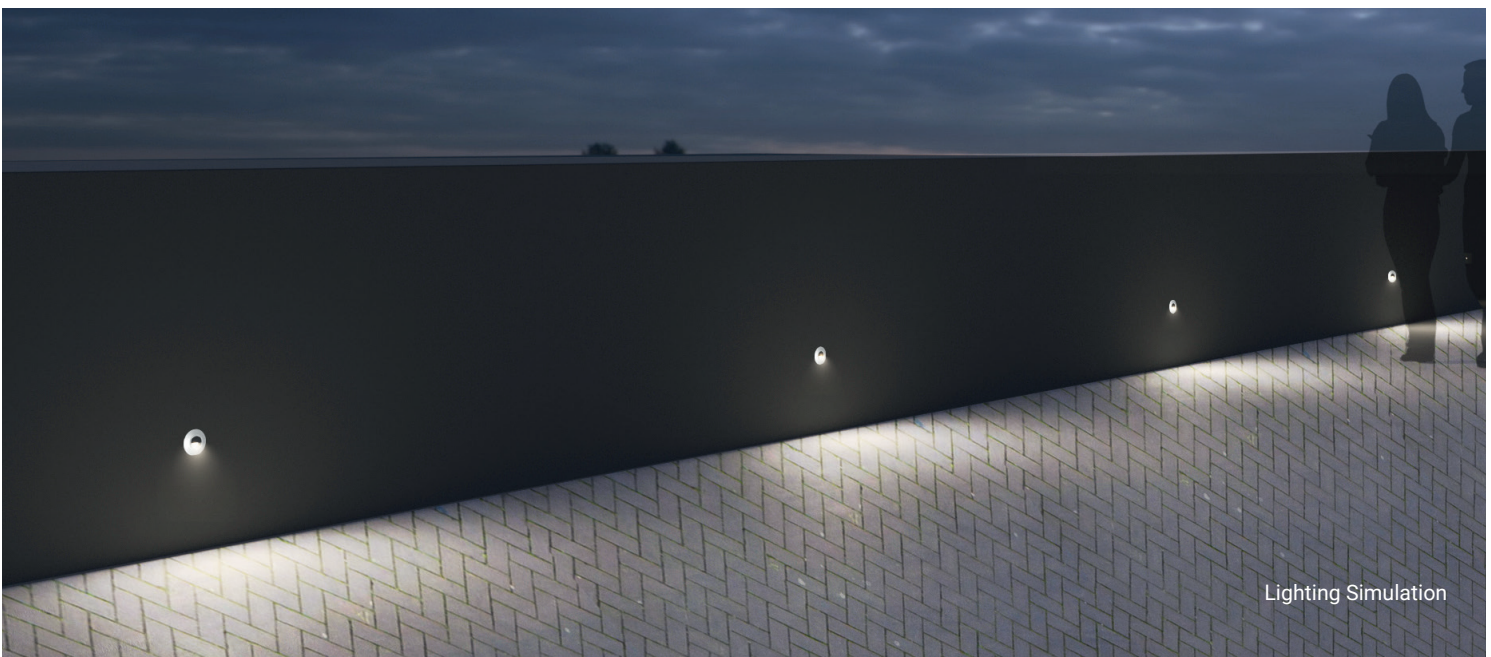


Lighting Simulation

### TERRA BLADE 55-R



Dimension (mm) :

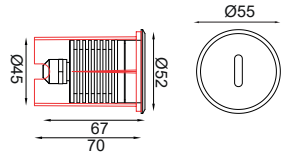

Order Code : Terra\_SL\_55-R\_1\_80\_BL\_27\_GG\_CC



FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	Blade	55-R	1 - 1W (126lm) 1.5 - 1.5W (180lm) 2 - 2W (252lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	BL - Blade	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	CC - Constant Current Driver (3V, 350mA/500mA/700mA)	-



### TERRA BLADE 55-S



Dimension (mm) :

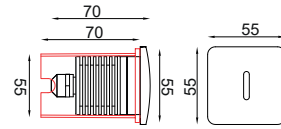

Order Code : Terra\_SL\_55-S\_1\_80\_BL\_27\_GG\_CC

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Terra	Blade	55-S	1 - 1W (126lm) 1.5 - 1.5W (180lm) 2 - 2W (252lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	BL - Blade	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	CC - Constant Current Driver (3V, 350mA/500mA/700mA)	-









## FEATURES

- Solid Aluminium Body.
- Extra Safety Impact Resistant, Toughened Glass.
- High Efficiency Optical System.
- Extra Clear Glass To Increase Efficiency Of The Fixture.
- High Grade Silicon Gasket- Heat & Cold Resistant.
- "Coro Safe" High Grade Anodizing.
- "Duracoat" Double Layer Body Coating To Withstand Corrosion.
- "Weatherprotect" Outdoor Rated Powder Coating.
- "Long Life" Thermal Management.




## OPTICS

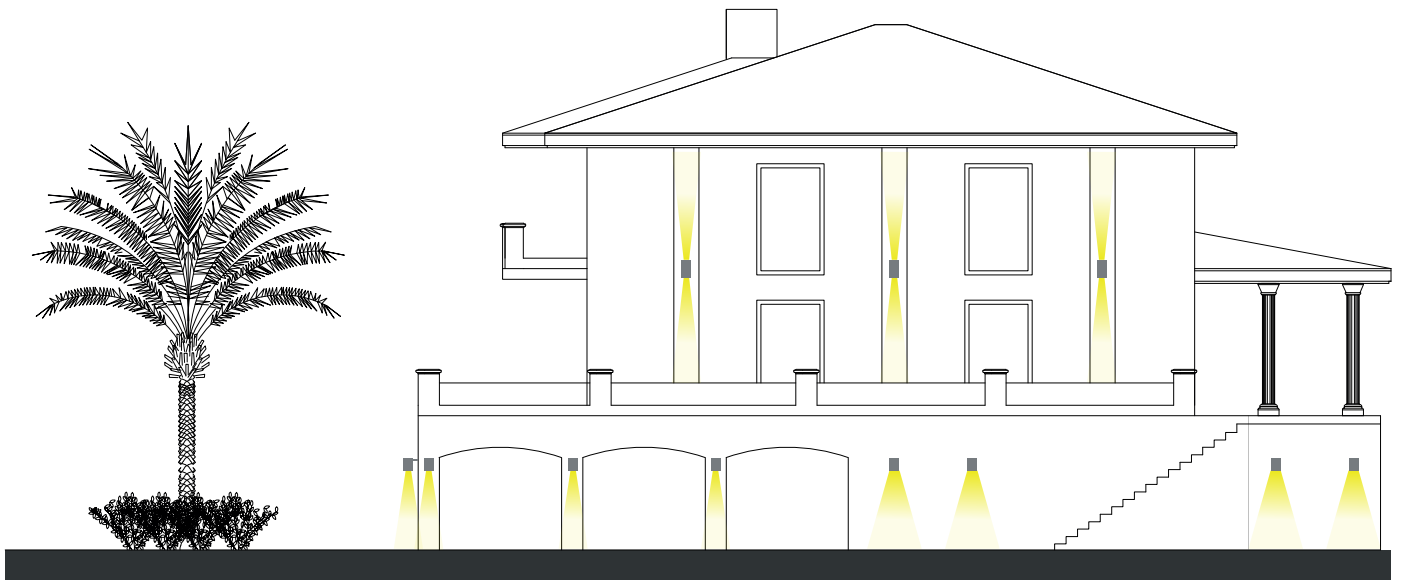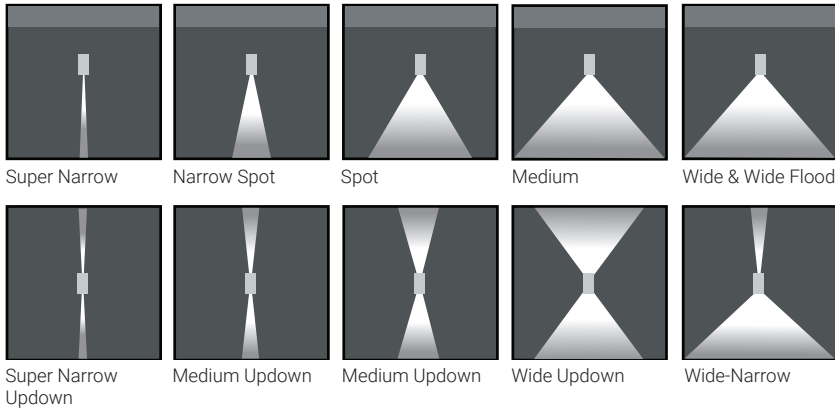

**BOXY WM 39**



Dimension (mm) :



Accessories



HL - 20  
(Hexcell Louvre)

Order Code : Boxy\_WM\_39\_2\_80\_NS\_27\_GG\_230\_HL-20


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Boxy	WM	39	2 - 2W (240lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 40° WF - 60°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 20



**BOXY WM-39UD (2W + 2W)**



Dimension (mm) :



Accessories



HL - 20  
(Hexcell Louvre)

Order Code : Boxy\_WM\_39-UD\_4\_80\_NS-M\_27\_GG\_230\_HL-20


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS UP-DOWN	CCT	FINISH	SUPPLY	ACCESSORIES
Boxy	WM	39-UD	4 - 4W (480lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 40° WF - 60°	NS - 10° M - 24° W - 40° WF - 60°	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 20



**BOXY WM-75-D3**



Dimension (mm) :



Accessories



HL - 48  
(Hexcell Louvre)


Order Code : Boxy\_WM\_75-D3\_8\_80\_NS\_27\_GG\_230\_HL-48

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Boxy	WM	75 - D3	8 - 8W (720lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° SP - 18° WF - 54°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 48



### BULLET WM 61D4-HP

Dimension (mm) :



Accessories



HL - 48  
(Hexcell Louvre)


Order Code : Bullet\_WM\_61D4-HP\_6\_80\_SS\_27\_GG\_230\_HL-48

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	WM	61D4-HP	6 - 6W (576lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SS - 4°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 48



### BULLET WM 61D-HP

Dimension (mm) :



Accessories



HL - 48  
(Hexcell Louvre)


Order Code : Bullet\_WM\_61D-HP\_6\_80\_SS\_27\_GG\_230\_HL-48

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	WM	61D-HP	6 - 6W (576lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 40° WF - 60°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 48



### BULLET WM 61-D3

Dimension (mm) :



Accessories



HL - 48  
(Hexcell Louvre)

Order Code : Bullet\_WM\_61-D3\_8\_80\_NS\_27\_GG\_230\_HL-48


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	WM	61-D3	8 - 8W (720lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SS - 4° NS - 10° M - 24°, W - 40° WF - 60°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 48



**BULLET WM 61D-COB**



Dimension (mm) :



Accessories



HL - 48  
(Hexcell Louvre)

Order Code : Bullet\_WM\_61D-COB\_6\_80\_SP\_27\_GG\_230\_HL-48


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	WM	61D-COB	6 - 6W (604lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 48



**BULLET WM 61UD-HP (6W + 6W)**



Dimension (mm) :



Accessories



HL - 48  
(Hexcell Louvre)

Order Code : Bullet\_WM\_61-UD-HP\_12\_80\_NS\_27\_GG\_230\_HL-48


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS UP-DOWN	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	WM	61UD-HP	12W (1440lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° NS - 10° SP - 18° SP - 18° WF - 54° WF - 54°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 48



**BULLET WM 61UD-D3 (7W + 7W)**



Dimension (mm) :



Accessories



HL - 48  
(Hexcell Louvre)

Order Code : Bullet\_WM\_61UD-D3\_14\_80\_NS\_27\_GG\_CC\_HL-48


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS UP-DOWN	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	WM	61UD-D3	14W - 7W+7W (2268lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° NS - 10° SP - 18° SP - 18° WF - 54° WF - 54°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 48



### BULLET 88 HP



Dimension (mm) :



Accessories



Order Code : Bullet\_WM\_88-HP\_20\_80\_NS\_27\_GG\_230\_HL-68


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	WM	88-HP	20 - 20W (2100lm)	80 - 80 CRI	NS - 10° M - 24° W - 40° WF - 60°	27 - 2700K 30 - 3000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 68



### BULLET 88 COB



Dimension (mm) :



Accessories



Order Code : Bullet\_WM\_88-COB\_16\_80\_SP\_27\_GG\_230\_HL-68


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	WM	88-COB	16 - 16W (1680lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 14° M - 22° W - 37°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 68






## FEATURES


- Solid Aluminium Body.
- Extra Safety Impact Resistant Toughened Glass.
- High Efficiency Optical System.
- Extra Clear Glass To Increase Efficiency Of The Fixture.
- "Coro Safe" High Grade Anodizing.
- "Duracoat" Double Layer Body Coating To Withstand Corrosion.
- "Weather Protect" Outdoor Rated Powder Coating.
- "Long Life" Thermal Management.

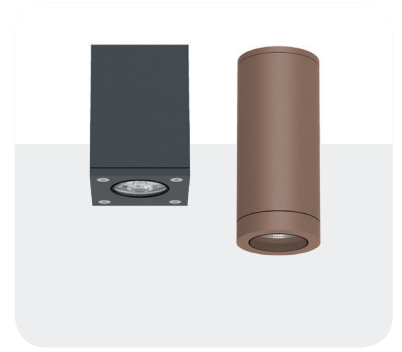


## OPTICS

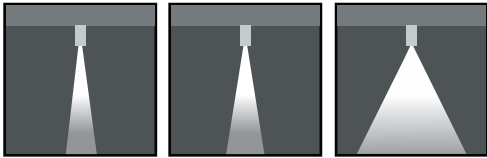

Narrow Spot      Spot      Medium



Wide      Wide Flood

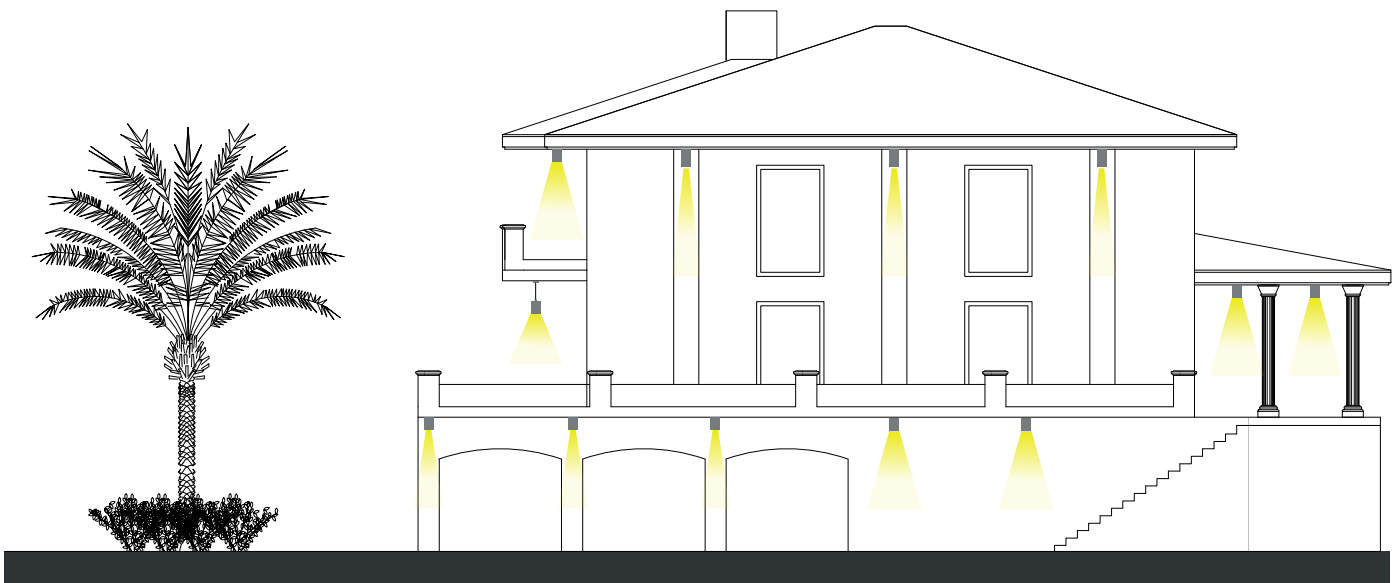




### BOXY CM 75-D3



Dimension (mm) :



Accessories



HL - 48  
(Hexcell Louvre)

Order Code : Boxy\_CM\_75-D3\_8\_80\_NS\_27\_GG\_230-HL-48


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Boxy	CM CP	75-D3	8 - 8W (720lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 36° WF - 40°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 48



### BULLET CM 61-D3



Dimension (mm) :



Accessories



HL - 48  
(Hexcell Louvre)

Order Code : Bullet\_CM\_61-D3\_8\_80\_NS\_27\_GG\_230-HL-48


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	CM CP	61-D3	8 - 8W (720lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 40° WFL - 60°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 48



### BULLET CM 61 COB



Dimension (mm) :



Accessories



HL - 48  
(Hexcell Louvre)

Order Code : Bullet\_CM\_61-COB\_8\_80\_SP\_27\_GG\_230-HL-48


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	CM CP	61-COB	8 - 8W (840lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 48



**BULLET CM 64 COB**



Dimension (mm) :



Accessories



HL - 48  
(Hexcell Louvre)

Order Code : Bullet\_CM\_64-COB\_11\_80\_SP\_27\_GG\_230\_HL-48


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	CM	64-COB	11 - 11W (1260lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 48



**BULLET CM 88 COB**



Dimension (mm) :



Accessories



HL - 68  
(Hexcell Louvre)

Order Code : Bullet\_CM\_88-COB\_20\_80\_SP\_27\_GG\_230\_HL-68

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	CM	88-COB	16 - 16W (2016lm)	80 - 80 CRI 90 - 90 CRI (On Request*)	SP - 14° M - 22° W - 37°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 68






**BOXY CP 75-D3**



Dimension (mm) :

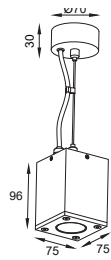

Accessories



HL - 48  
(Hexcell Louvre)

Order Code : Boxy\_CP\_75-D3\_8\_80\_NS\_27\_GG\_230-HL-48


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Boxy	CP	75-D3	8 - 8W (720lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 36° WF - 40°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 48



**BULLET CP 61-D3**



Dimension (mm) :

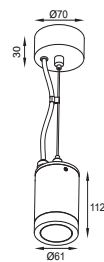

Accessories



HL - 48  
(Hexcell Louvre)

Order Code : Bullet\_CP\_61-D3\_8\_8\_NS\_27\_GG\_230\_HL-48


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	CP	61-D3	8 - 8W (720lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 40° WFL - 60°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 48



**BULLET CP 61 COB**



Dimension (mm) :

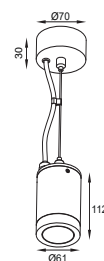

Accessories




HL - 48  
(Hexcell Louvre)

Order Code : Bullet\_CP\_61-COB\_8\_80\_SP\_27\_GG\_230\_HL-48

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	CP	61-COB	8 - 8W (840lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 48



### BULLET CP 64 COB

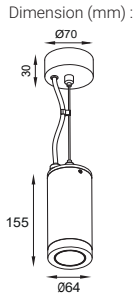

Accessories




HL - 48  
(Hexcell Louvre)

Order Code : BULLET\_CP\_64-COB\_11\_80\_SP\_27\_GG\_230\_HL-48

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	CP	64-COB	11 - 11W (1260lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 48



### BULLET CP 88 COB

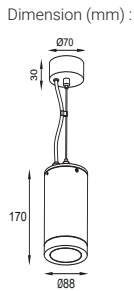

Accessories



HL - 68  
(Hexcell Louvre)

Order Code : Bullet\_CP\_88-COB\_20\_80\_SP\_27\_GG\_230\_HL-68

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bullet	CP	88-COB	16 - 16W (2016lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 14° M - 22° W - 37°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 68




Catenary System on Request





Adjustable IP66 projectors available in various beam angles- super spot, narrow, wide and wide flood for indoor and outdoor floor, wall and ceiling applications ideal for lighting of statue, trees, shrubs, entrance, façades etc.



An inappropriate installation of a lighting element may lead to infiltration through cables and so the entrance of water within the product. WP system is a device guaranteeing the protection against water infiltrations through cables.


High Grade Neoprene Silicon Based Italian Cable to Withstand Any Weather Conditions.

High grade brass nickel plated IP68 German gland.

Bracket made of SS304. Special SS insert to ensure high-strength threading.

Body in black/silver hard anodized processed with "Weatherprotect" outdoor rated powder coating. spike made of anticorodal grade 6063 aluminium entirely on a CNC lathe.

Aluminium cowl for anti-glare/Honey comb louvre (optional).

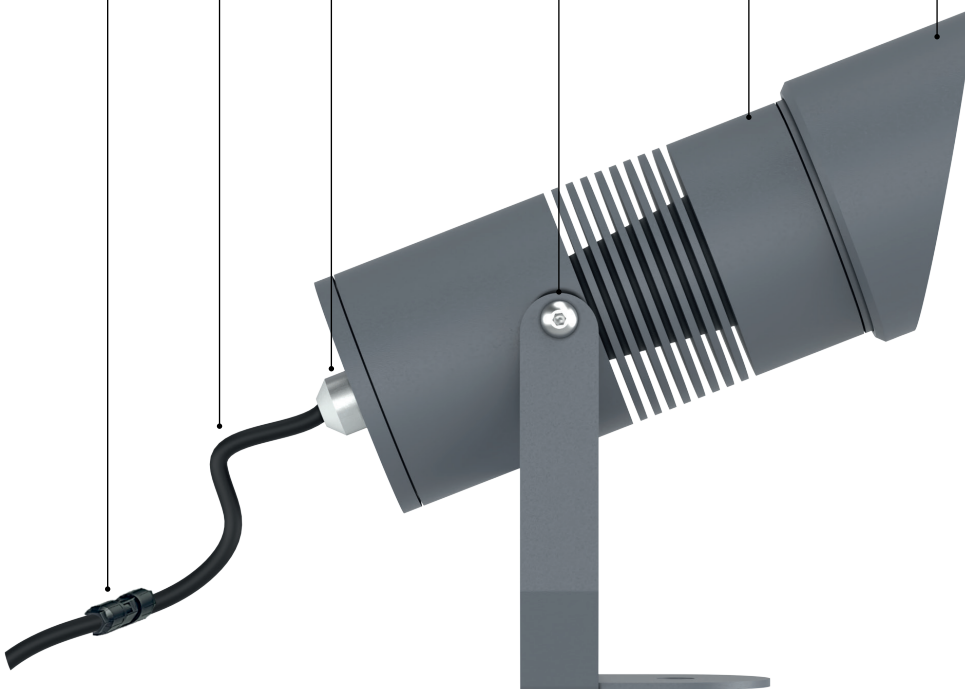

2700K

3000K

4000K




## FEATURES


- Solid Aluminium Body.
- Extra Safety Impact Resistant Toughened Glass.
- High Efficiency Optical System.
- Extra Clear Glass To Increase Efficiency Of The Fixture.
- High Grade Silicon Gasket- Heat & Cold Resistant.
- High Grade Brass Nickel Plated German Gland.
- High Grade Neoprene Silicon Based Italian Cable To Withstand Any Weather Conditions
- Recessed Spike Made Of GFR Polymer.
- "Coro Safe" High Grade Anodizing.
- "Duracoat" Double Layer Body Coating To With Stand Corrosion.
- "Weatherprotect" Outdoor Rated Powder Coating.
- "Capillary Protect System" Anti-Capillary System To Protect Any Water Ingress From Cable Joints.
- 1000mm All Weather Neoprene Silicon Power Cable Included



## OPTICS

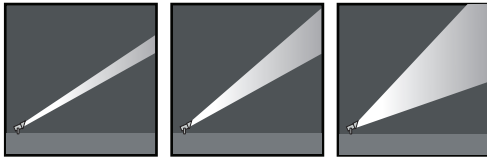

Super Spot    Narrow Spot    Medium




Wide    Wide Flood





### CIELO SP 32

Dimension (mm) :



Accessories



HL - 20  
(Hexcell Louvre)



CL-32  
(COWL)



TB  
(Tree Belt)



SP-212  
(Spike)


Order Code : Cielo\_SP\_32\_2\_80\_NS\_27\_GG\_CC\_HL-20

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Cielo	SP	32	2 - 2W (252lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 40° WF - 60°	27 - 2700K 30 - 3000K 40 - 4000K	GG- Graphit Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	CC - Constant Current Driver (3V, 700mA)	HL - 20 CL - 32 TB- Tree Belt SP - 212



### CIELO SP 64-D3

Dimension (mm) :



Accessories



HL - 48  
(Hexcell Louvre)



CL-64  
(COWL)



TB  
(Tree Belt)



SP-232  
(Spike)


Order Code : Cielo\_SP\_64-D3\_8\_80\_NS\_27\_GG\_CC\_HL-48

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Cielo	SP	64 - D3	6 - 6W (720lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 18° WF - 54°	27 - 2700K 30 - 3000K 40 - 4000K	GG- Graphit Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	CC - Constant Current Driver (9V, 700mA)	HL - 48 CL - 64 TB- Tree Belt SP - 232



### CIELO SP 64-COB

Dimension (mm) :



Accessories



HL - 48  
(Hexcell Louvre)



CL-64  
(COWL)



TB  
(Tree Belt)



SP-232  
(Spike)

Order Code : Cielo\_SP\_64-COB\_9\_80\_SP\_27\_GG\_CC\_HL-48


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Cielo	SP	64-COB	9 - 9W (1260lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° MF - 38°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	CC - Constant Current Driver (36V, 250mA)	HL - 48 CL - 64 TB- Tree Belt SP - 232




### CIELO SP 118



Dimension (mm) :



Accessories



HL - 87  
(Hexcell Louvre)

CL - 118  
(COWL)



TB  
(Tree Belt)

SP-232  
(Spike)

Order Code : Cielo\_SP\_118\_18\_80\_NS\_27\_GG\_CC\_HL-87


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Cielo	SP	118	18 - 18W (2160lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 40° WF - 60° EL - 30 x 65°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	CC - Constant Current Driver (27V, 700mA)	HL - 87 CL - 118 TB- Tree Belt SP - 232



### LUGAR SP 41



Dimension (mm) :



Accessories



HL - 20  
(Hexcell Louvre)

CL - 41  
(COWL)



TB  
(Tree Belt)

SP-232  
(Spike)

Order Code : Lugar\_SP\_41\_3\_80\_NS\_27\_GG\_230\_HL-20


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Lugar	SP	41	3 - 3W (240lm) 6 - 6W (480lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 40° WF - 60°	27 - 2700K 30 - 3000K 40 - 4000K	GG- Graphit Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC 24 - 24V DC	HL - 20 CL - 41 TB- Tree Belt SP - 232



### LUGAR SP 61 COB



Dimension (mm) :



Accessories



HL - 48  
(Hexcell Louvre)

CL - 64  
(COWL)



TB  
(Tree Belt)

SP-232  
(Spike)

Order Code : Lugar\_SP\_61-COB\_8\_80\_SP\_27\_GG\_230\_HL-48


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Lugar	SP	61 - COB	8 - 8W (907lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC 24 - 24V DC	HL - 48 CL - 64 TB- Tree Belt SP - 232



### LUGAR SP 64-D3



Dimension (mm) :



Accessories



Order Code : Lugar\_SP\_64-D3\_8\_80\_NS\_27\_GG\_230\_HL-48


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Lugar	SP	64-D3	8 - 8W (720lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 18° WF - 54° DF - Diffused	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC 24 - 24V DC	HL - 48 CL - 64 TB- Tree Belt SP - 232



### LUGAR SP 64-COB



Dimension (mm) :



Accessories



Order Code : Lugar\_SP\_64-COB\_11\_80\_SP\_27\_GG\_230\_HL-48


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Lugar	SP	64-COB	11 - 11W (1260lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC 24 - 24V DC	HL - 48 CL - 64 TB- Tree Belt SP - 232




### LUGAR SP 64-HP



Dimension (mm) :



Accessories



Order Code : Lugar\_SP\_64-HP\_10\_80\_SS\_27\_GG\_230\_HL-48


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Lugar	SP	64-HP	10 - 10W (1008lm)	80 - 80 CRI	SS - 4°	27 - 2700K 30 - 3000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC 24 - 24V DC	HL - 48 CL - 64 TB- Tree Belt SP - 232



### LUGAR SP 75-HP



Dimension (mm) :



Accessories



Order Code : Lugar\_SP\_75-HP\_15\_80\_SP\_27\_GG\_230\_HL-48


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Lugar	SP	75 - HP	15 - 15W (1764lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 40° WF - 60°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC 24 - 24V DC	HL - 48 CL - 75 TB- Tree Belt SP - 232



### LUGAR SP 75-COB



Dimension (mm) :



Accessories



Order Code : Lugar\_SP\_75-COB\_15\_80\_SP\_27\_GG\_230\_HL-48


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Lugar	SP	75 - COB	15 - 15W (1764lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC 24 - 24V DC	HL - 48 CL - 75 TB- Tree Belt SP - 232



### LUGAR SP 88-COB



Dimension (mm) :



Accessories




Order Code : Lugar\_SP\_88-COB\_20\_80\_SP\_27\_GG\_230\_HL-68

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Lugar	SP	88 - COB	20 - 20W 2520lm	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC 24 - 24V DC	HL - 68 CL - 88 TB- Tree Belt SP - 232



# LUGAR SP 88-HP

Dimension (mm) :



Accessories



HL - 68 (Hexcell Louvre)



CL - 88 (COWL)



TB (Tree Belt)



SP- 232 (Spike)

Order Code : Lugar\_SP\_88-HP\_20\_80\_NS\_27\_GG\_230\_HL-68

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Lugar	SP	88-HP	20 - 20W (2160lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 40° WF - 60°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC 24 - 24V DC	HL - 68 CL - 88 TB- Tree Belt SP - 232



Maker Maxity, Mumbai



Grand Hyatt Lullu, Kochi







## FEATURES

- Bollards Designs That Blends With The Modern City Landscapes To Provide A More Homogeneous And Distinguished Look.
- Designs That Affects The Lighting Output, And There Are Other Parameters Like Mounting Height, Spacing, Outreach, Drag Coefficient Which Influence The Choice Of The Bollards.
- Various Designs To Choose
- High Efficiency Led Technology Provide Maximum Flexibility For Applications Such As Gardens, Landscape, Pathways or Walkways.
- Corrosion Resistant Double Layer Polyester Powder Coated Paint Finish Die Cast/ Extruded Aluminium Housing/Gi Pipes With Stainless Steel Screws And Silicone Gaskets. Power Unit Is Built In.
- Thermal-Shock Resistant Tempered Glass.
- Operating Temperature: -20°C ~ +55°C
- Outstanding Light Efficiency And Integrates Itself Through The Reduced Design Into Historic And Modern Surroundings.
- Both Its Appearance And The Materials Used In Its Manufacture Are Intended To Last.



## OPTICS

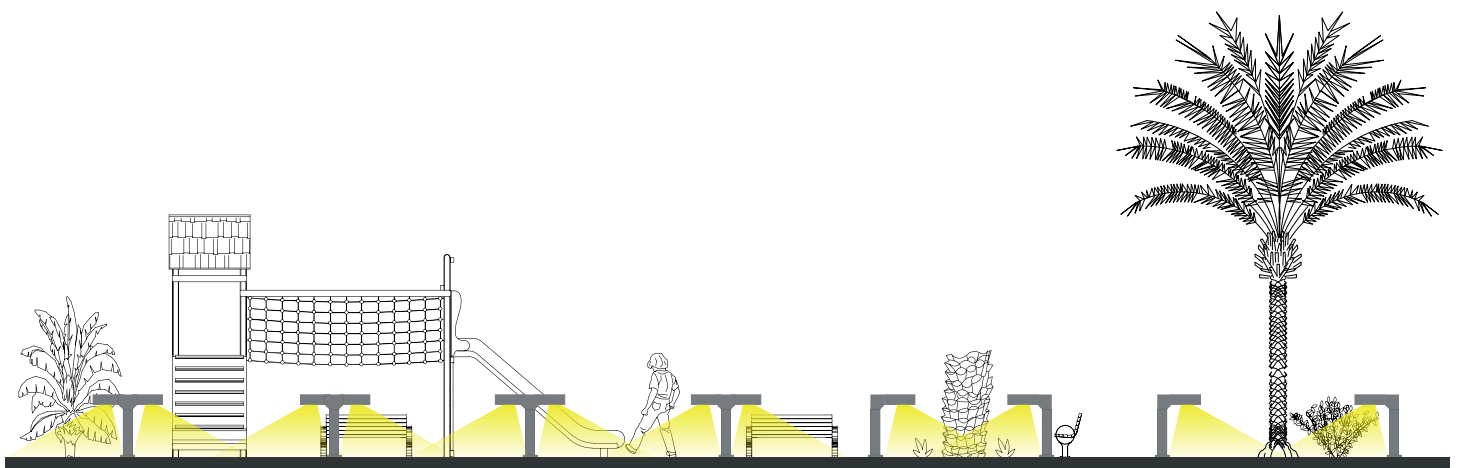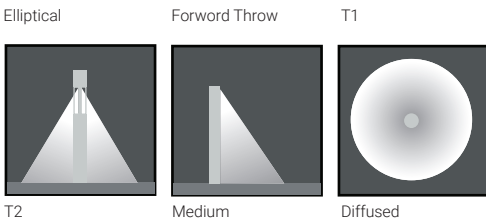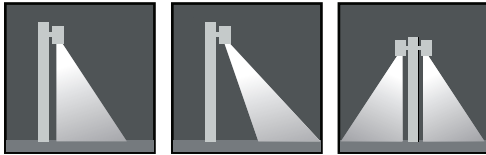




CAMPA



Dimension (mm):

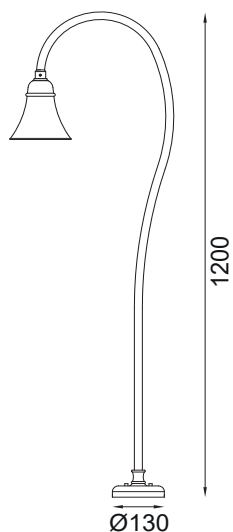

Accessories



ABK-3 (Anchor Bolt Kit)

Order Code : Campa\_BO\_120\_11\_80\_DF\_30\_B\_230\_ABK-3


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Campa	BO	120 - 1200mm	11 - 11W (1260lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	DF - 120°	30 - 3000K 40 - 4000K	Brass	230 - 230V AC	ABK-3



FUNGO



Dimension (mm):

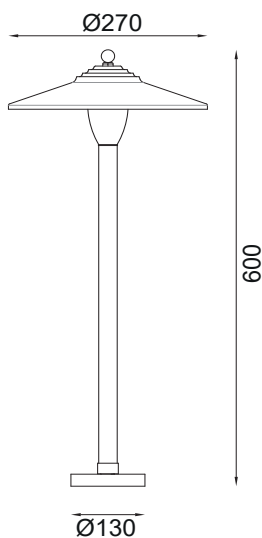

Accessories




ABK-3 (Anchor Bolt Kit)

Order Code : Fungo\_BO\_60\_10\_80\_DF\_30\_C\_R\_ABK-3


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Fungo	BO	60 - 600mm ht.	10 - 10W (1120lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	DF - Diffused	30 - 3000K 40 - 4000K	C - Copper	R- Remote Driver	ABK-3



DISK 1

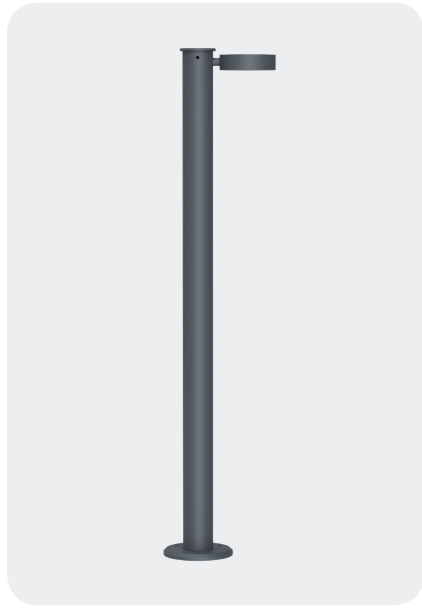

Dimension (mm):

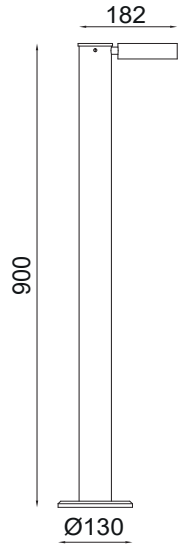

Accessories




ABK-3  
(Anchor Bolt Kit)

Order Code : Disk\_BO\_35\_11\_80\_120\_30\_GG\_230\_ABK-3


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Disk	BO	35 - 350mm	11 - 11W (1260lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	120 - 120°	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark Leaf Green	230 - 230V AC	ABK-3
		60 - 600mm			T1 - 110 x 160°				
		90 - 900mm			T2 - 110 x 160° T3 - 75 x 160°				



DISK 2

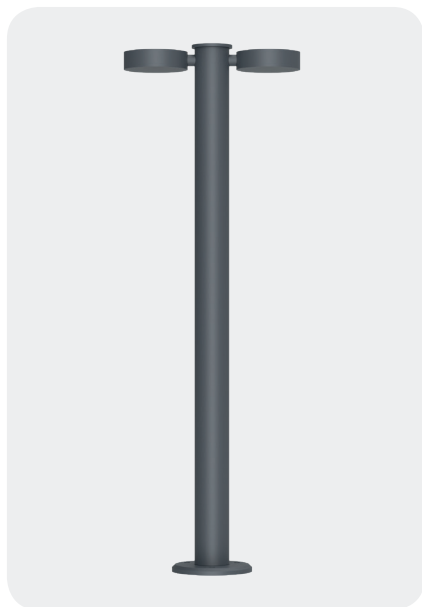

Dimension (mm):

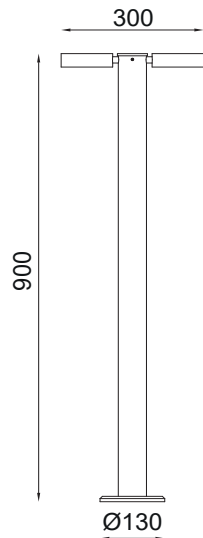

Accessories





ABK-3  
(Anchor Bolt Kit)

Order Code : Disk\_2\_BO\_35\_22\_80\_120\_30\_GG\_230\_ABK-3

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Disk 2	BO	35 - 350mm	22 - 11W + 11W (2520lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	120 - 120°	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark Leaf Green	230 - 230V AC	ABK-3
		60 - 600mm			T1 - 110 x 160°				
		90 - 900mm			T2 - 110 x 160° T3 - 75 x 160°				



MUSHO

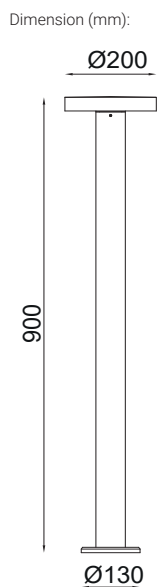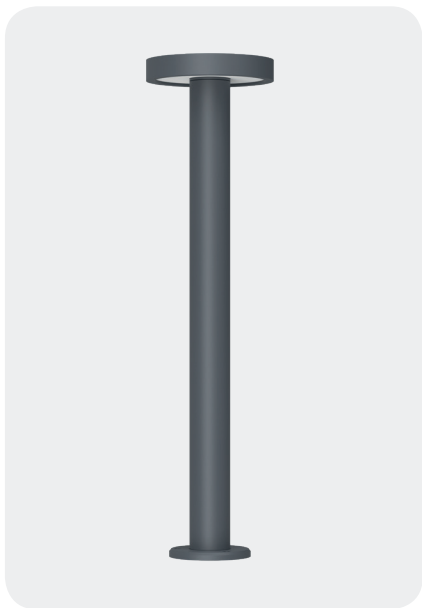

Accessories



ABK-3  
(Anchor Bolt Kit)

Order Code : Musho\_BO\_35\_14\_80\_DF\_30\_GG\_230\_ABK-3

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Musho	BO	35 - 350mm 60 - 600mm 90 - 900mm	20 - 20W (2268lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	DF - Diffused	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark Leaf Green	230 - 230V AC	ABK-3




Custom Made For Project

FOCUS 1



Dimension (mm):

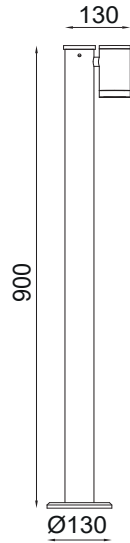

Accessories



ABK-3  
(Anchor Bolt Kit)

Order Code : Focus-1\_BO\_75\_11\_80\_SP\_30\_GG\_230\_ABK-3


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Focus 1	BO	75-750mm 90-900mm	11 - 11W (1260lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark Leaf Green	230 - 230V AC	ABK-3



FOCUS 2



Dimension (mm):

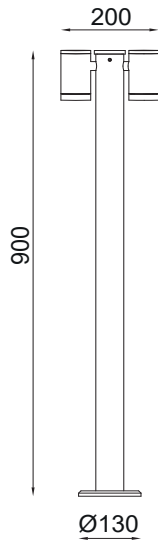

Accessories



ABK-3  
(Anchor Bolt Kit)

Order Code : Focus-2\_BO\_75\_22\_80\_SP\_30\_GG\_230\_ABK-3


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Focus 2	BO	75-750mm 90-900mm	22W - 11W+11W (2520lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark Leaf Green	230 - 230V AC	ABK-3



## BAMBOO



Dimension (mm):

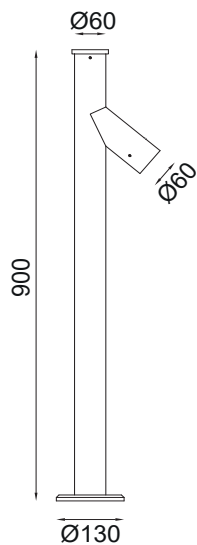

Accessories



ABK-3  
(Anchor Bolt Kit)

Order Code : Bamboo\_BO\_70\_11\_80\_NS\_30\_GG\_230\_ABK-3


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bamboo	BO	70 - 700mm 90 - 900mm	11- 11W (1260lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 16° M - 22° W - 38°	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark Leaf Green	230 - 230V AC	ABK-3



## BAMBOO 2



Dimension (mm):

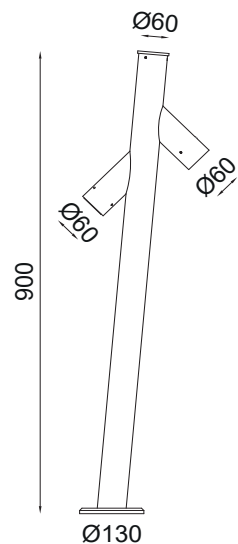

Accessories



ABK-3  
(Anchor Bolt Kit)


Order Code : Bamboo-2\_BO\_70\_22\_80\_SP\_30\_GG\_230\_ABK-3

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bamboo 2	BO	70 - 700mm 90 - 900mm	22- 11W+11W (2520lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark Leaf Green	230 - 230V AC	ABK-3






## NARROWLINE

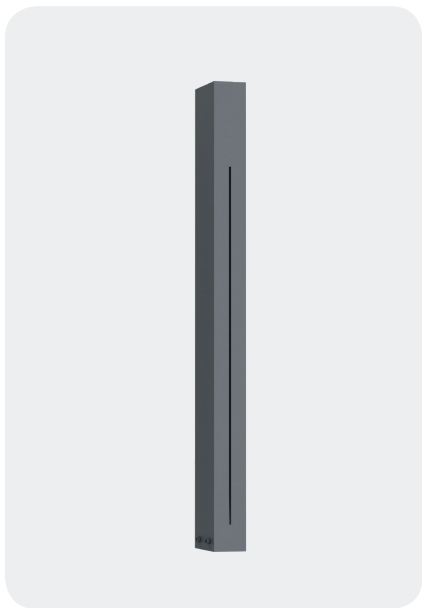

Dimension (mm):

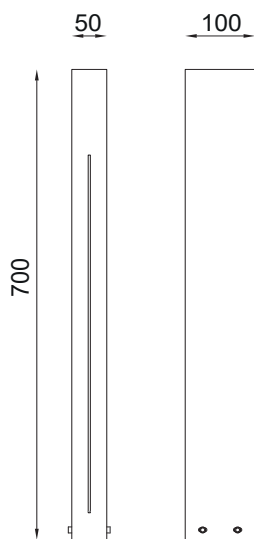

Accessories



ABK-2  
(Anchor Bolt Kit)

Order Code : Narrowline\_BO\_70\_6\_80\_BL\_30\_GG\_230\_ABK-2


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Narrowline	BO	70-700mm	6 - 6W (576lm)	80 - 80 CRI	BL - Blade	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	ABK-2



## MONO



Dimension (mm):

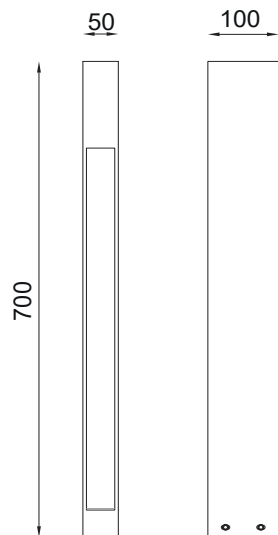

Accessories




ABK-2  
(Anchor Bolt Kit)

Order Code : Mono\_BO\_70\_6\_80\_M\_30\_GG\_230\_ABK-2


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Mono	BO	70-700mm	6 - 6W (576lm)	80 - 80 CRI	M - Medium	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	ABK-2



ANGLE

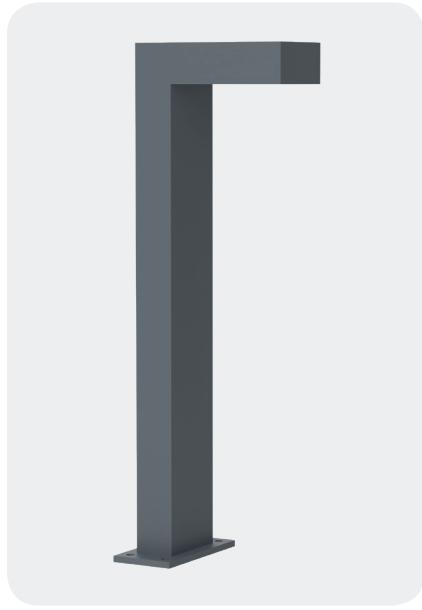

Dimension (mm):

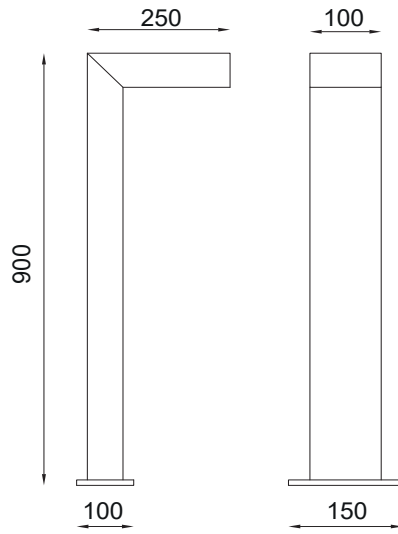

Accessories




ABK-4  
(Anchor Bolt Kit)

Order Code : Angle\_BO\_35\_18\_80\_T1\_30\_GG\_230\_ABK-4


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Angle	BO	35 - 350mm 60 - 600mm 90 - 900mm	18 - 18W (1920lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	T1 - 148 x 107° (Elliptical) T2 - 158 x 110° (Forward Throw)	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 -230V AC	ABK-4



SETTE

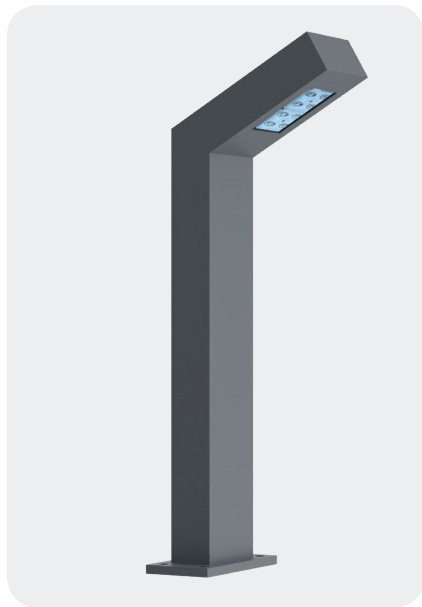

Dimension (mm):

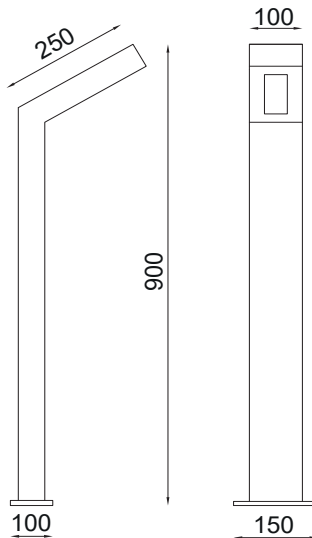

Accessories



ABK-4  
(Anchor Bolt Kit)

Order Code : Sette\_BO\_35\_18\_80\_T1\_30\_GG\_230\_ABK-4

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Angle	BO	35 - 350mm 60 - 600mm 90 - 900mm	18 - 18W (1920lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	T1 - 148 x 107° (Elliptical) T2 - 158 x 110° (Forward Throw)	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	ABK-4












MODELLO R

Dimension (mm):

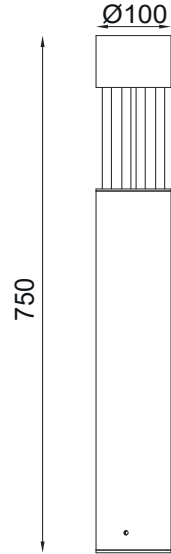

Accessories



ABK-2  
(Anchor Bolt Kit)

Order Code : Modello-R\_BO\_75\_11\_80\_120\_30\_GG\_230\_ABK-2

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Modello R	BO	75 - 750mm	11 - 11W (1260lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	120 - 120° T1 - 110 x 160° T2 - 110 x 160° T3 - 75 x 160°	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	ABK-2




L&T, Mumbai

SOLE

Dimension (mm):

Accessories

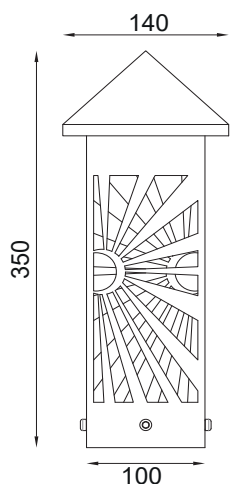

ABK-2  
(Anchor Bolt Kit)

Order Code : Sole\_BO\_35\_10\_80\_P\_30\_GG\_230\_ABK-2

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Sole	BO	35 - 350mm 60 - 600mm	10 - 10W (1260lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	P - Pattern	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	ABK-2



Custom Design Available on Request





## FEATURES

- Post Top Designs That Blends With The Modern City Landscapes To Provide A More Homogenous And Distinguished Look.
- Designs That Affects The Lighting Output, And There Are Other Parameters Like Mounting Height, Spacing, Outreach, Drag Coefficient And Pole Geometry, Which Influence The Choice Of The Poles.
- Various Designs To Choose From With Different Types Of Poles And Their Wide Range Of Mounting Heights.
- High Efficiency Led Technology Provide Maximum Flexibility For Road And Residential Street Applications.
- Corrosion Resistant Double Layer Polyester Powder Coated Paint Finish Die Cast Aluminium Housing/Gi Pipes With Stainless Steel Screws And Silicone Gaskets. Power Unit Is Built In.
- Mounting Bracket Made Of Gi.
- Thermal-Shock Resistant Tempered Glass.
- Operating Temperature:  $-20^{\circ}\text{C} \sim +55^{\circ}\text{C}$
- Outstanding Light Efficiency And Integrates Itself Through The Reduced Design Into Historic And Modern Surroundings.
- Both Its Appearance And The Materials Used In Its Manufacture Are Intended To Last.

## OPTICS




T1 T2 T3 T4 Diffused

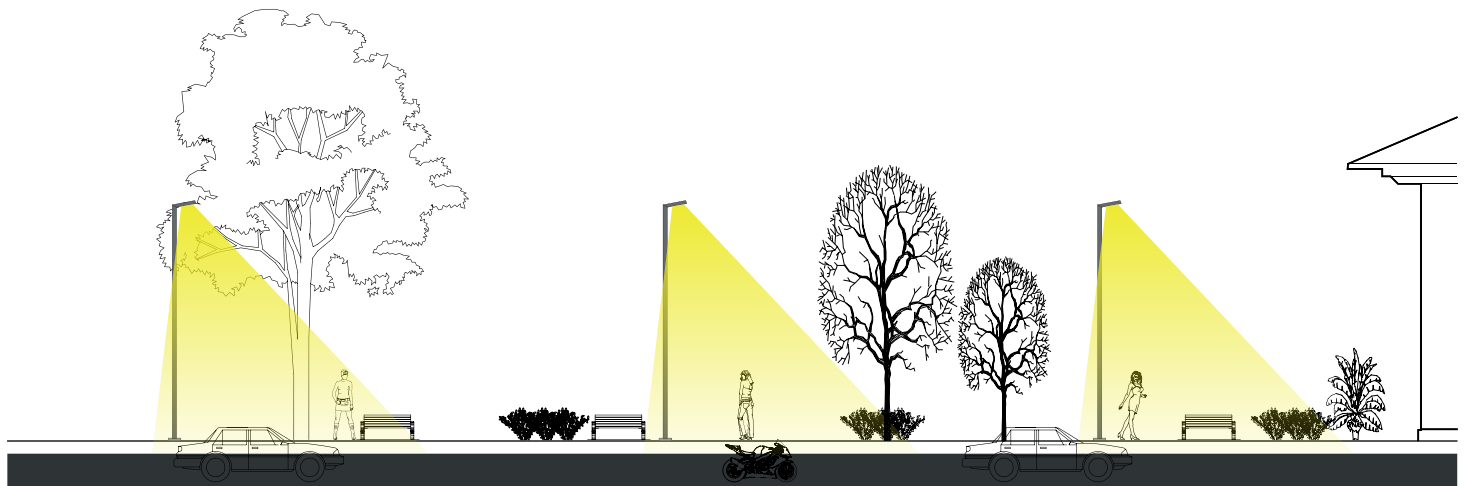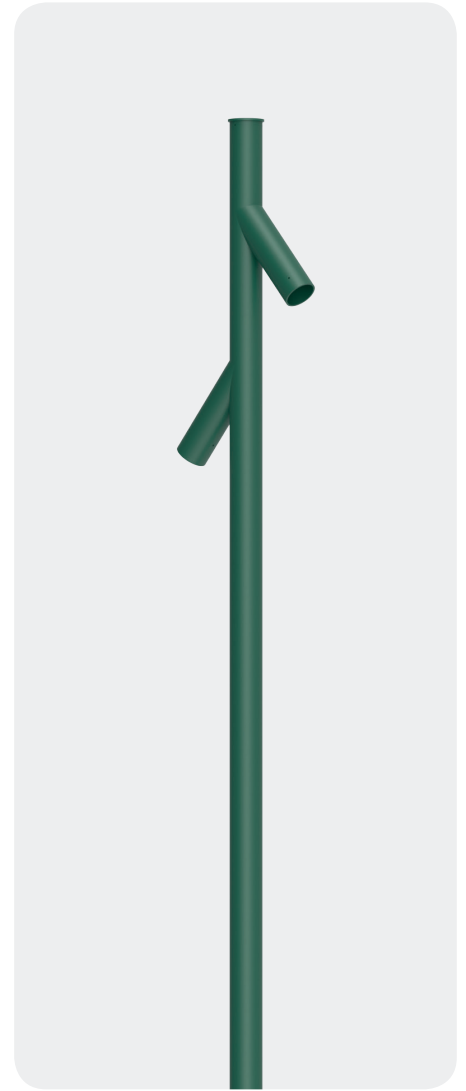

### CILLINDRO PT



Dimension (mm):

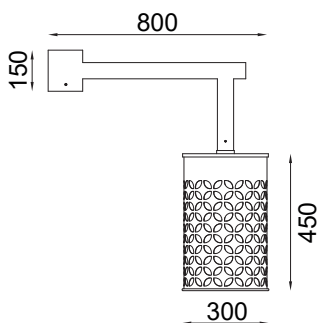

Order Code : Cillindro\_PT\_30\_60\_80\_120\_30\_GG\_230


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Cillindro	PT	30-300	60 - 40W+20W (40w Down) (20w Up light) (6120lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	120 - 120° T1 - 110X160° T2 - 110X160° T3 - 75X160°	30 - 3000K 40 - 4000K 60 - 6000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	



### CILLINDRO TWIN PT



Dimension (mm):

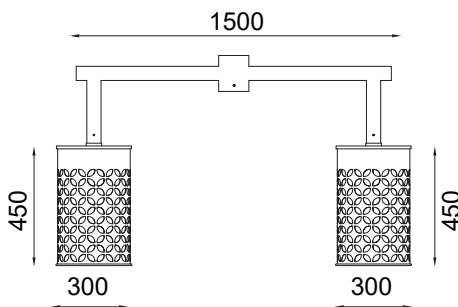


Order Code : Cillindro Twin\_PT\_30\_120\_80\_120\_30\_GG\_230

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Cillindro Twin	PT	30-300	120 - 80W+40W (80w Down) (40w Up light) (12240lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	120 - 120° T1 - 110X160° T2 - 110X160° T3 - 75X160°	30 - 3000K 40 - 4000K 60 - 6000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	



CAMPA PT

Dimension (mm):

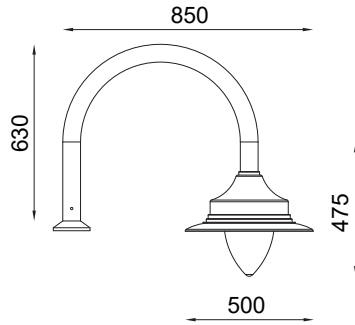


Order Code : Campa\_PT\_50\_42\_80\_120\_30\_GG\_230

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Campa	PT	50- 500	42 - 42W (5292lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	120 - 120° T1 - 110 x 160° T2 - 110 x 160° T3 - 75 x 160°	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	



ORLUNA PT

Dimension (mm):

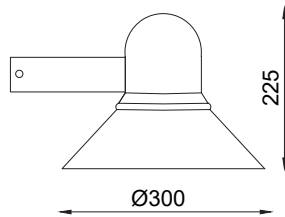

Order Code : Orluna\_PT\_01\_42\_80\_120\_30\_GG\_230


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Orluna	PT	30- 300	42 - 42W (5292lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	120 - 120° T1 - 110 x 160° T2 - 110 x 160° T3 - 75 x 160°	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	





## MOON RING PT

Dimension (mm):

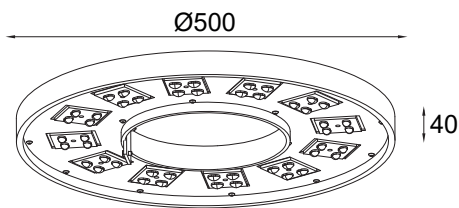


Order Code : Moonring\_PT\_50\_72\_80\_T1\_30\_GG\_230

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Moon Ring	PT	50- 500	72 - 72W (7488lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	T1 - 148X107° T2 - 158X100° T3 - 160X130°	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	



## MUSHO PT

Dimension (mm):

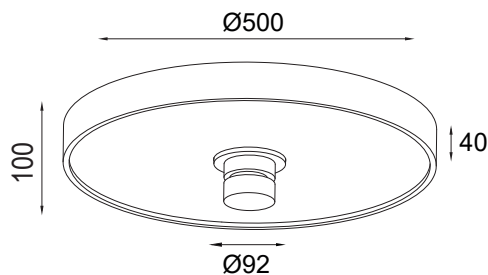



Order Code : Musho\_PT\_50\_72\_80\_DF\_30\_GG\_230

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Musho	PT	50- 500	72 - 72W (7495lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	DF - Diffused	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	



### ANGLE PT

Dimension (mm):

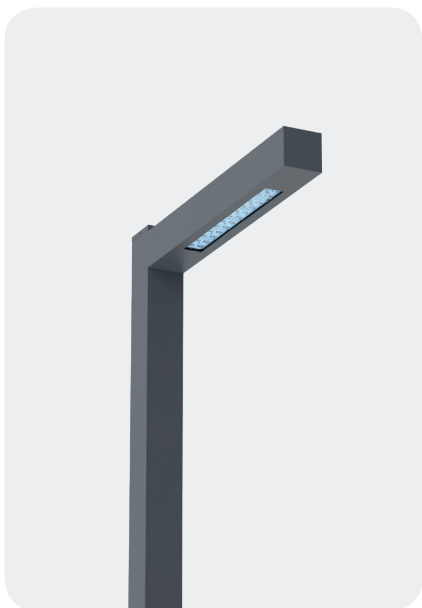


Order Code : Angle\_PT\_80\_45\_80\_T1\_30\_GG\_230

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Angle	PT	80 - 800	45 - 45W (4680lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	T1 - 148X107° T2 - 158X100° T3 - 160X130°	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	



### SETTE PT

Dimension (mm):

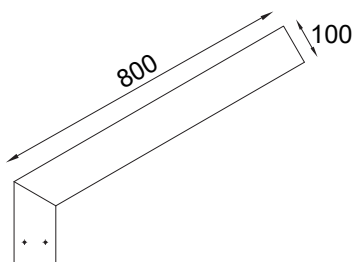


Order Code : Sette\_PT\_80\_45\_80\_T1\_30\_GG\_230

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Sette	PT	80 - 800	45 - 45W (4703lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	T1 - 148X107° T2 - 158X100° T3 - 160X130°	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	



# ZIGZAG PT

Dimension (mm):

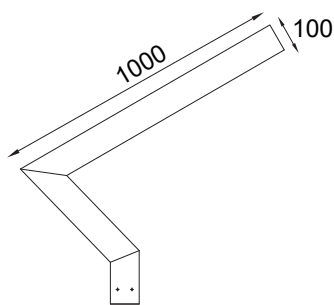


Order Code : Zigzag\_PT\_100\_60\_80\_T1\_30\_GG\_230

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Zigzag	PT	100 - 1000	60 - 60W (6480lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	T1 - 148X107° T2 - 158X100° T3 - 160X130°	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	




Available in various combinations on request.

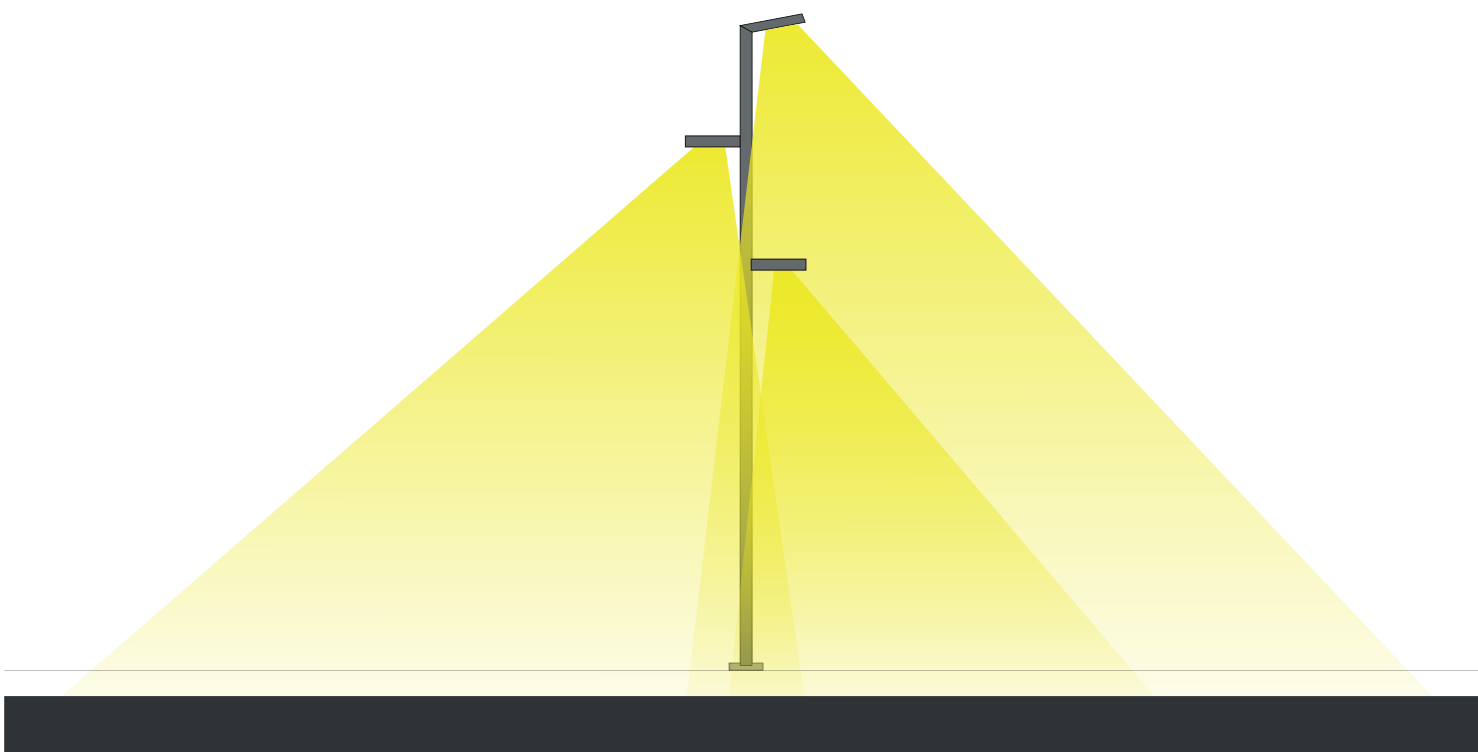

**BAMBOO PT**



Dimension (mm):

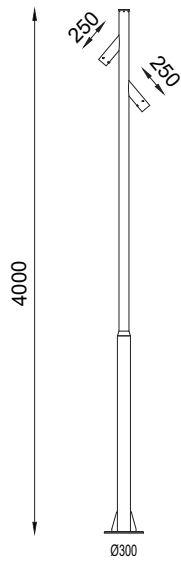


Order Code : Bamboo\_PT\_300\_36\_80\_SP\_30\_GG\_230


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Bamboo	PT	300 - 3000 400 - 4000	36W - 18w+18w (4320lm) 42W - 21w+21w	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	



**COLUMN PT**

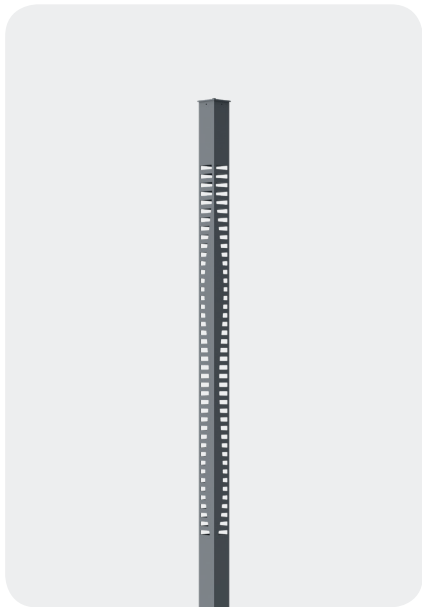

Dimension (mm):

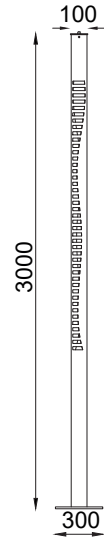



Order Code : Column\_PT\_300\_60\_80\_DF\_30\_GG\_230

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Column	PT	300 - 3000	60 - 60W (7200lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	DF - Diffused	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	



## PILLAR 110 PT

Dimension (mm):

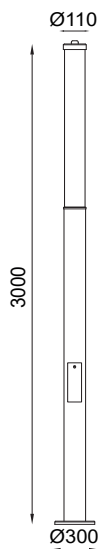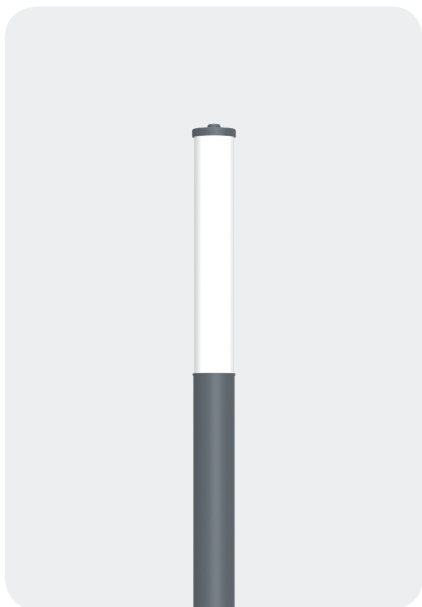


Order Code : Pillar-110\_PT\_30\_80\_80\_DF\_30\_GG\_230

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Pillar 110	PT	300 - 3000 400 - 4000	80 - 80W (9600lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	DF - Diffused	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	



## PILLAR 170 PT

Dimension (mm):




Order Code : Pillar-170\_PT\_30\_80\_80\_DF\_30\_GG\_230


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Pillar 170	PT	30 - 3000mm 40 - 4000mm	80 - 80W (9600lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	DF - Diffused	30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	



### LUGAR 4 PT

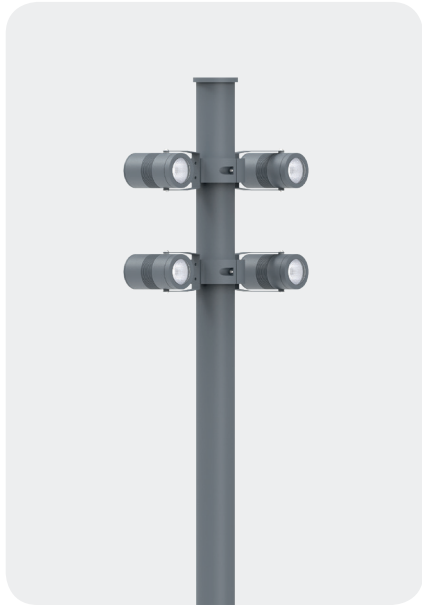

Dimension (mm):

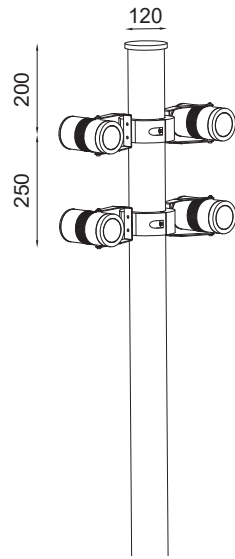

Order Code : Lugar 4\_PT\_4x88-COB\_20\_80\_SP\_27\_GG\_230\_HL-68


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Lugar 4	PT	4 x 88 - COB 4 x 88 - HP	20 - 20W (2520lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 68 CL- Cowl CLM- Clamp



### LUGAR 6 PT



Dimension (mm):

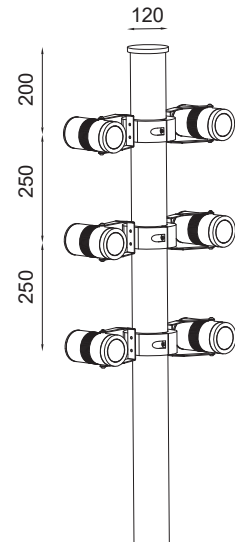


Order Code : Lugar 6\_PT\_6x88-COB\_20\_80\_SP\_27\_GG\_230\_HL-68

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Lugar 6	PT	6 x 88 - COB 6 x 88 - HP	20 - 20W (2520lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 68 CL- Cowl CLM- Clamp



# LUGAR TWRIL PT

Dimension (mm):

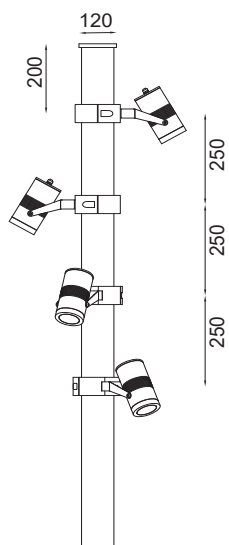

Order Code : Lugar Twril\_PT\_4x88-COB\_20\_80\_SP\_27\_GG\_230\_HL-68

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Lugar Twril	PT	4 x 88 - COB 4 x 88 - HP	20 - 20W (2520lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	SP - 16° M - 22° W - 38°	27 - 2700K 30 - 3000K 40 - 4000K	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green	230 - 230V AC	HL - 68 CL - Cowl CLM - Clamp



Available in Horizontal Pole







6M

5M

4M

3M


2.5M





## FEATURES

- Straight / Step Galvanised Pole
- "Duracoat" Double Layer Body Coating to Withstand Corrosion.
- "Weather Protect" Outdoor Rated Powder Coating.
- Equipped with MCB with earthing connection.

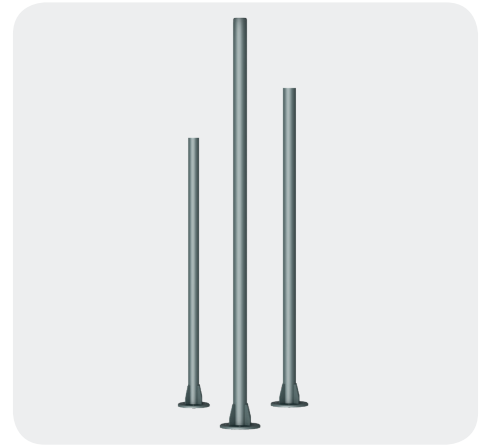

## ACCESSORIES




Foundation Kit




Foundation Kit

## FINISH




GG - Graphite Grey



DB - Dark Black



MW - Matt White



C - Corten





DLG - Dark Leaf Green

SPR - 30/40


SPSQ - 30/40


STPR- 30/40/50/60

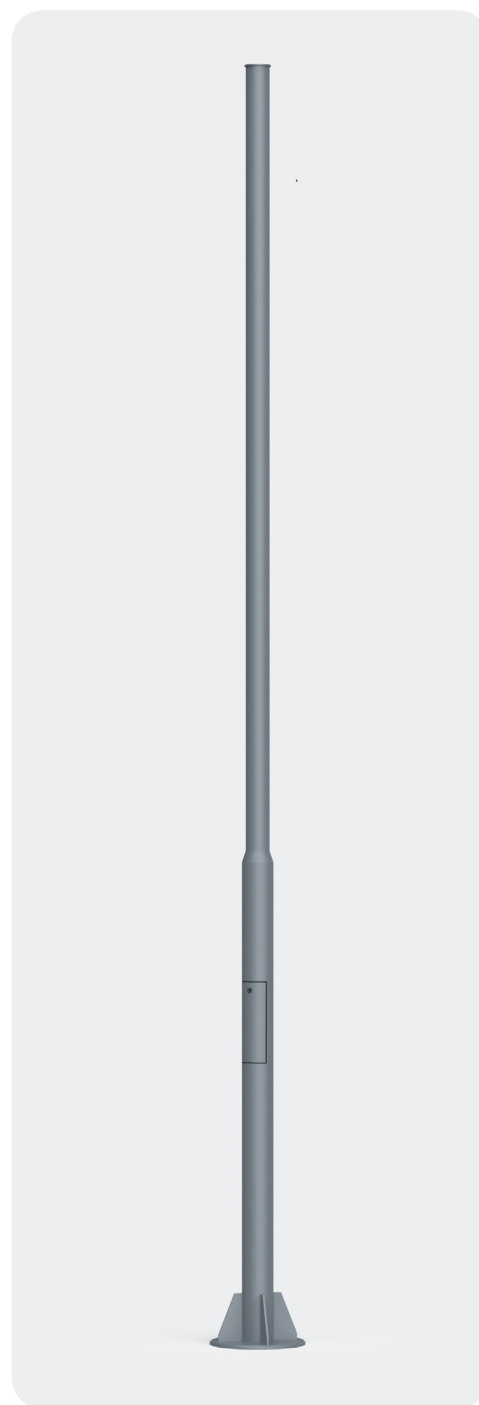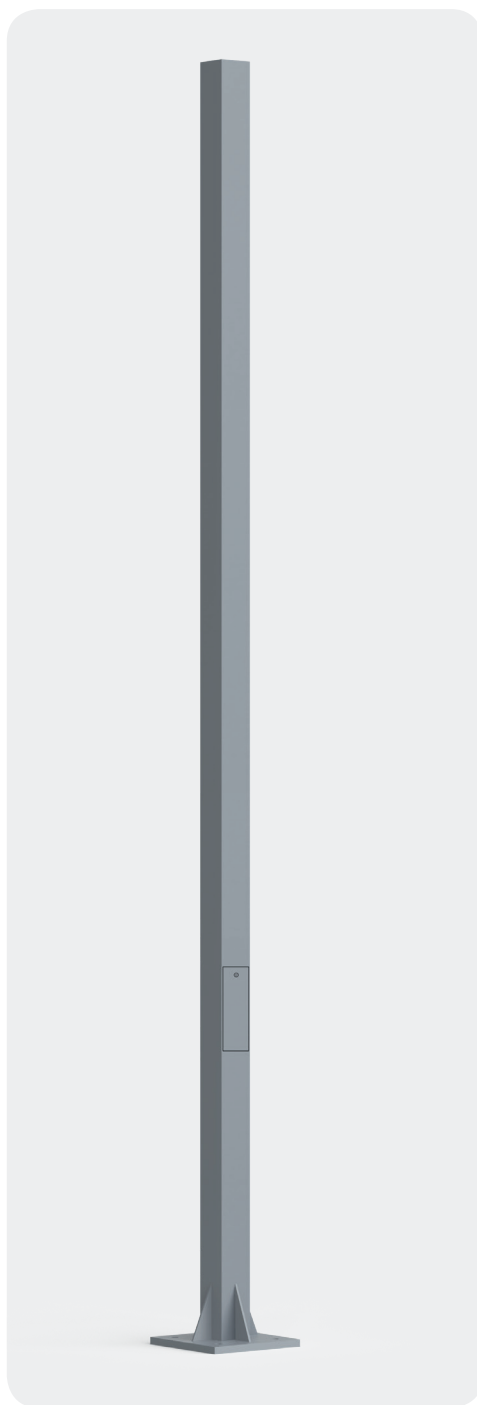

Order Code : Pole\_SQP\_30\_100\_GG

FAMILY	TYPE	CODE	H1	H2	D	CP	FINISH
Pole	SPR- Single pole round	30	3000mm	1000mm	102 - 102mm	90mm X 250mm	GG - Graphite Grey DB - Dark Black MW - Matt White C - Corten DLG - Dark leaf Green
		40	4000mm		112 - 112mm		
Pole	SPSQ- Single pole Square	30	3000mm	1000mm	100 -	80mm X 250mm	
		40	4000mm		100mm x 100mm		
Pole	STPR- Step pole round	30	3000mm	1000mm	90 - 90mm~112mm	90mm X 250mm	
		40	4000mm		112 - 112mm~140mm		
		50	5000mm				
		60	6000mm				

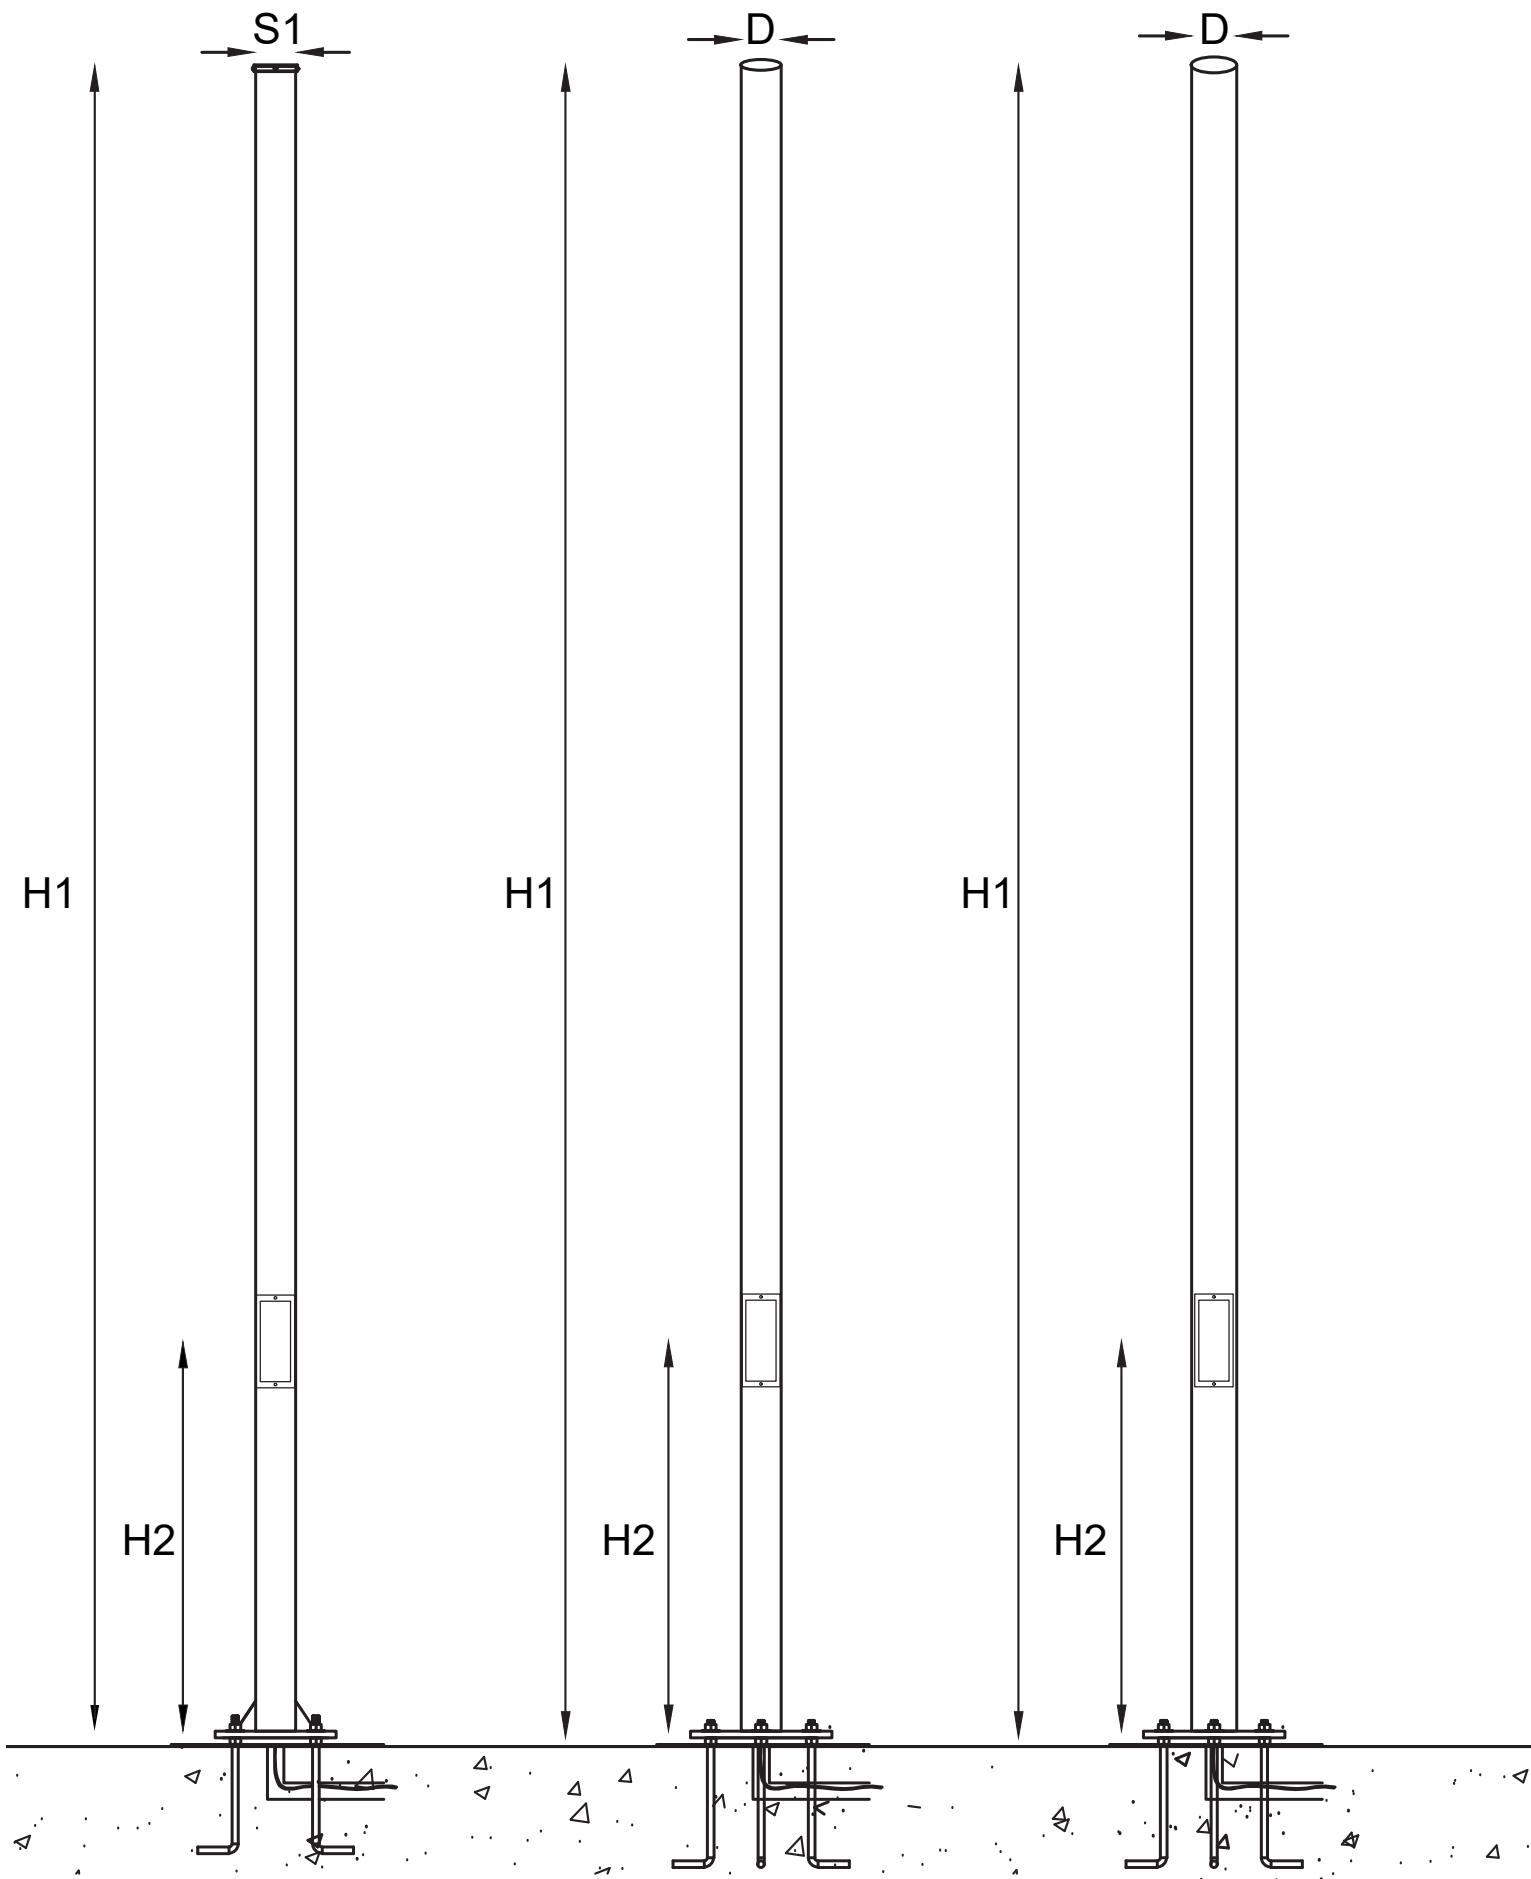

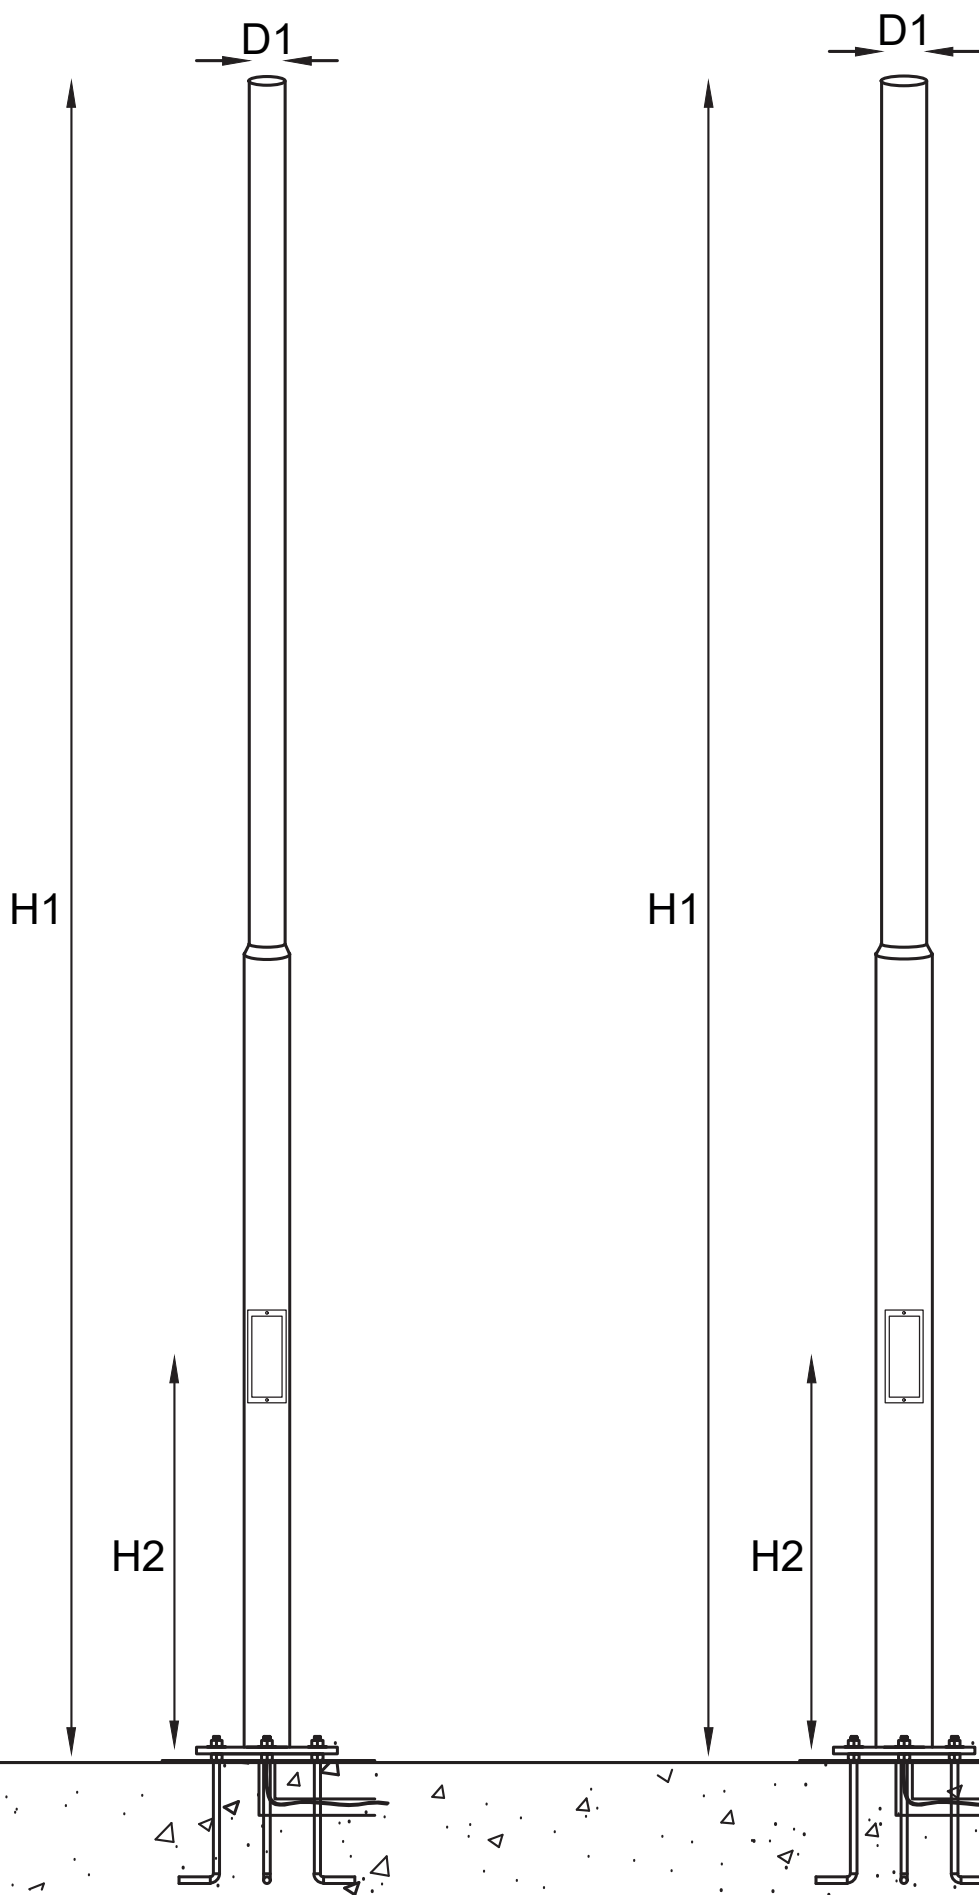


## FEATURES

- The NASTRO LED Strip Fulfils The Higher Demands On An Absolute Homogeneous Illumination.
- From Close Up Light Haunches. 120 Points Of Light Per Mtr. Gurantee A complete Constant Line of Light.
- NASTRO Sysytem impresses With An Excellent Price Performance Ratio.
- Its Maintenance Free, Lifetime Amounts Over 50,000 Hrs As A Minimal Energy Consumption With Higher Lumen Output.



## OPTICS




D - Diffused



2700K

3000K

4000K

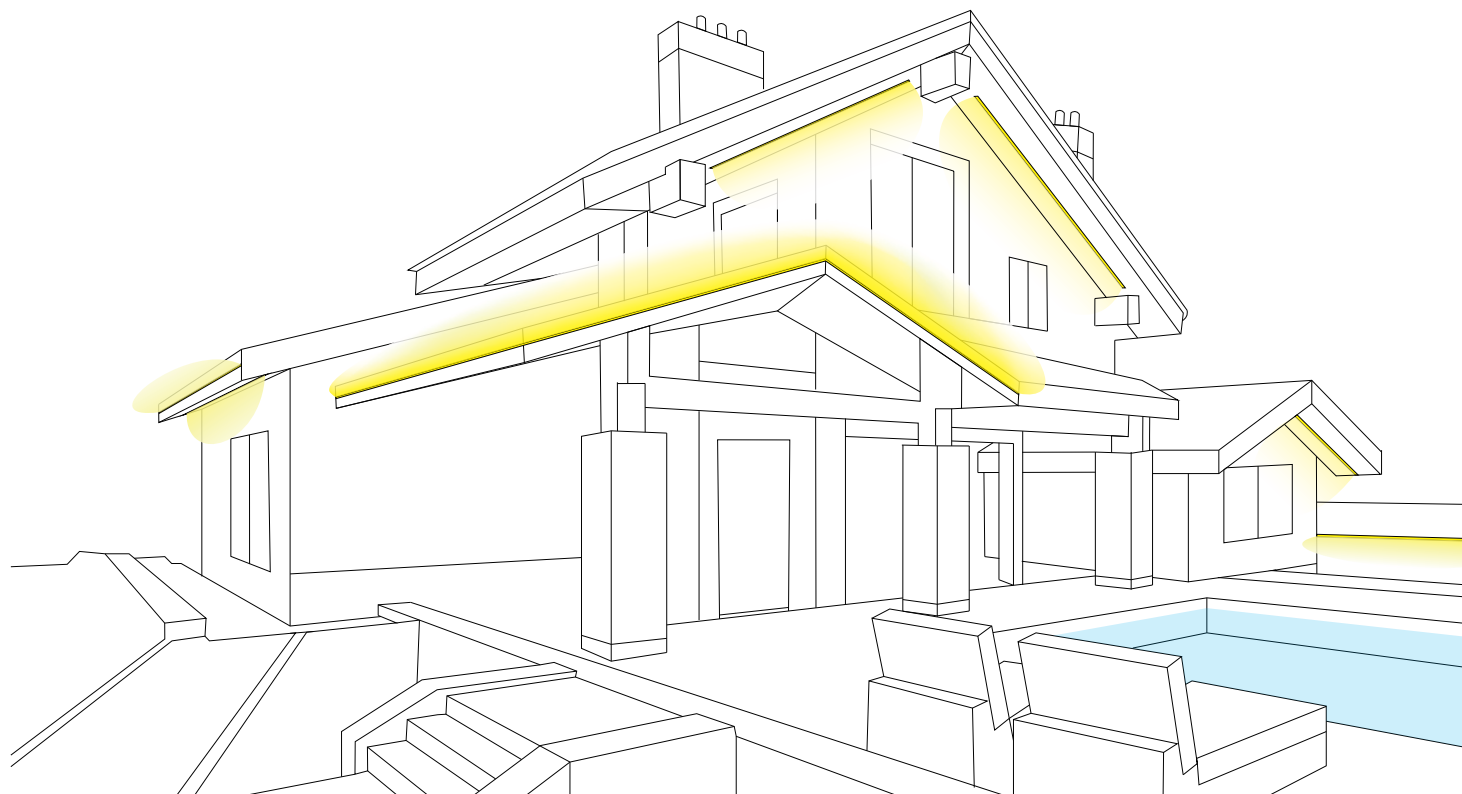




## NASTRO 120



Dimension (mm):

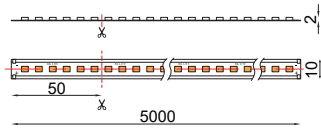


Order Code : Nastro\_SLI\_0803-120\_20\_80\_O\_27\_20\_DC\_ALP

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	IP	SUPPLY	ACCESSORIES
Nastro	SL I	0803-120	3 - 3.2W (360lm)	80 - 80 CRI 90 - 90 CRI	0 - 120°	27 - 2700K 30 - 3000K 40 - 4000K	20 - IP20	DC - 24V DC	ALP- Aluminium Profiles
			5 - 4.8W (540lm)						
			7 - 7.2W ( 810lm)						
			10 - 9.6W ( 1080lm)						
			12 - 12W (1350lm)						
			15 - 14.4W (1620lm)						
20 - 20W (2160lm)									




For Aluminium Profile Refer Page No: 90-91

## NASTRO 120 IP

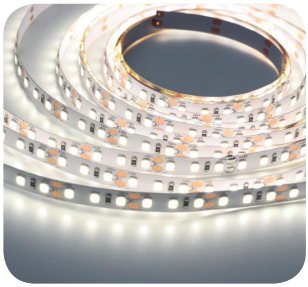

Dimension (mm):

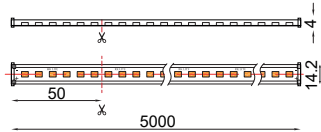

Order Code : Nastro\_SLO\_120 IP\_4.8\_80\_O\_27\_DC\_ALP


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	IP	SUPPLY	ACCESSORIES
Nastro	SL O	1204-120	3 - 3.2W (360lm)	80 - 80 CRI 90 - 90 CRI	0 - 120°	27 - 2700K 30 - 3000K 40 - 4000K	67 - IP67	DC - 24V DC	ALP- Aluminium Profiles
			5 - 4.8W (540lm)						
			7 - 7.2W ( 810lm)						
			10 - 9.6W ( 1080lm)						
			12 - 12W (1350lm)						
			15 - 14.4W (1620lm)						




For Aluminium Profile Refer Page No: 90-91



### CORNER S



Dimension (mm):




CODE	1616-S
SIZE	1000mm
FINISH	Silver Anodized
DIFFUSER	Opal
ACCESSORIES	End Cap & Fixing Clips



### CORNER R



Dimension (mm):




CODE	1616-R
SIZE	1000mm
FINISH	Silver Anodized
DIFFUSER	Opal
ACCESSORIES	End Cap & Fixing Clips




### ROUND 30




Dimension (mm):




CODE	3021
SIZE	1000mm
FINISH	Silver Anodized
DIFFUSER	Opal
ACCESSORIES	End Cap & Fixing Clips



### FLEX




Dimension (mm):




CODE	1907
SIZE	1000mm
FINISH	Silver Anodized
DIFFUSER	Opal
ACCESSORIES	End Cap & Fixing Clips



### CLOSET



Dimension (mm):




CODE	3312
SIZE	1000mm
FINISH	Silver Anodized
DIFFUSER	Opal
ACCESSORIES	End Cap & Fixing Clips



## WALL UP/DOWN



Dimension (mm):




CODE	2383
SIZE	100mm
FINISH	Silver Anodized
DIFFUSER	Opal
ACCESSORIES	End Cap & Fixing Clips



## FLAT ( SURFACE )




Dimension (mm):




CODE	1709
SIZE	1000mm
FINISH	Silver Anodized
DIFFUSER	Opal
ACCESSORIES	End Cap & Fixing Clips



## DEEP ( SURFACE )




Dimension (mm):




CODE	1716
SIZE	1000mm
FINISH	Silver Anodized
DIFFUSER	Opal
ACCESSORIES	End Cap & Fixing Clips



## FLAT ( RECESSED )




Dimension (mm):




CODE	2309
SIZE	1000mm
FINISH	Silver Anodized
DIFFUSER	Opal
ACCESSORIES	End Cap & Fixing Clips



## DEEP ( RECESSED )

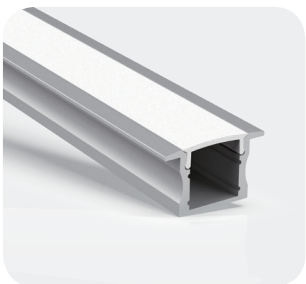

Dimension (mm):



CODE	2316
SIZE	1000mm
FINISH	Silver Anodized
DIFFUSER	Opal
ACCESSORIES	End Cap & Fixing Clips




## FEATURES

- The Flex LED Strip Fulfills The Higher Demands On An Absolute Homogeneous Illumination
- From Close Up Light Haunches Gurantee a complete Constant Line of Light.
- Flex System impresses With An Excellent Price Performance Ratio. Its Maintenance Free, Lifetime.
- Amounts Over 50,000 Hrs As A Minimal Energy Consumption With Higher Lumen Output.
- Dimmable by using dimmer controller.
- 2M maximum length.
- Easy Installation Mounting Bracket!
- Minimum bend radius 150mm.
- Verious End cap options.





## OPTICS



Diffused




## Bending

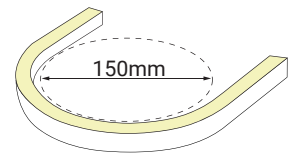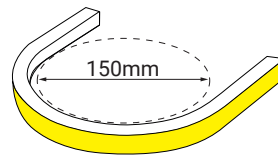

## GLOW FLEX TB-1010



Dimension (mm) :

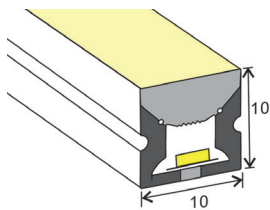

Order Code : Glow Flex\_TB\_1010\_7\_80\_O\_27\_DC\_EC1

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	SUPPLY
Glow Flex	TB- Top Bend	1010	7 - 7.2W (371lm) 10 - 9.6W (530lm) 15 - 14.4W(795lm)	80 - 80 CRI	0 - 120°	27 - 2700K 30 - 3000K 40 - 4000K	DC - 24V DC




### Accessories

EC11010 End Cap Without Hole	EC21010 End Cap Straight	EC31010 End Cap Left	EC41010 End Cap Right	EC51010 End Cap Bottom	MP1010 Mounting Profile	MC1010 Mounting Clip	Power Supply	Cable	Connectors

## GLOW FLEX TV-2515



Dimension (mm) :

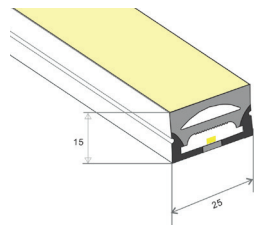

Order Code : Glow Flex\_TB\_2515\_15\_80\_O\_27\_DC\_EC1


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	SUPPLY
Glow Flex	TB- Top Bend	2515	15 - 14.4W (795lm)	80 - 80 CRI	0 - 120°	27 - 2700K 30 - 3000K 40 - 4000K	DC - 24V DC



### Accessories

EC12515 End Cap Without Hole	EC52515 End Cap Bottom	MP2515 Mounting Profile	MC2515 Mounting Clip	Power Supply	Cable	Connectors

### GLOW FLEX SB-0612

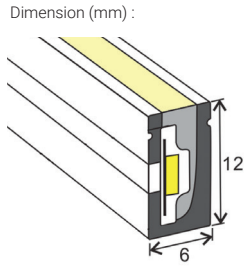

Order Code : Glow Flex\_SB\_0612\_10\_80\_O\_27\_DC\_EC1


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	SUPPLY
Glow Flex	SB- Side Bend	0612	10 - 10W (530lm)	80 - 80 CRI	0 - 120°	27 - 2700K 30 - 3000K 40 - 4000K	DC - 24V DC



#### Accessories

EC10612 End Cap Without Hole	EC20612 End Cap Straight	EC30612 End Cap Left	EC4 - End Cap Right	EC50612 End Cap Bottom	MP0612 Mounting Profile	MC0612 Mounting Clip	Power Supply	Cable	Connectors

### GLOW FLEX SB-1020



Order Code : Glow Flex\_SB\_1020\_10\_80\_O\_27\_DC\_EC1


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	SUPPLY
Glow Flex	SB- Side Bend	1020	10 - 10W (530lm)	80 - 80 CRI	0 - 120°	27 - 2700K 30 - 3000K 40 - 4000K	DC - 24V DC




#### Accessories

EC11020 End Cap Without Hole	EC21020 End Cap Straight	EC31020 End Cap Left	EC41020 End Cap Right	EC51020 End Cap Bottom	MP1020 Mounting Profile	MC1020 Mounting Clip	Power Supply	Cable	Connectors

## GLOW FLEX SB-1220



Dimension (mm) :



Order Code : Glow Flex\_SB\_1220\_5\_80\_O\_27\_DC\_EC1


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	SUPPLY
Glow Flex	SB- Side Bend	1220	5 - 4.8W (265lm) 10 - 9.6W (530lm) 15 - 14.4W(795lm)	80 - 80 CRI	0 - 120°	27 - 2700K 30 - 3000K 40 - 4000K	DC - 24V DC




### Accessories

EC11220 End Cap Without Hole	EC31220 End Cap Left	EC41220 End Cap Right	EC51220 End Cap Bottom	MP1220 Mounting Profile	MC1220 Mounting Clip	Power Supply	Cable	Connectors

## GLOW FLEX SB- 1615



Dimension (mm) :

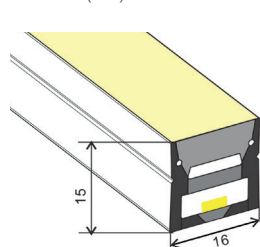

Order Code : Glow Flex\_SB\_1615\_7\_80\_16\_27\_DC\_EC1

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	SUPPLY
Glow Flex	SB- Side Bend	1615	7 - 7.2W (371lm) 10 - 9.6W (530lm) 15 - 14.4W(795lm)	80 - 80 CRI	16 - 160°	27 - 2700K 30 - 3000K 40 - 4000K	DC - 24V DC




### Accessories

EC11615 End Cap Without Hole	EC21615 End Cap Straight	MP1615 Mounting Profile	MC1615 Mounting Clip	Power Supply	Cable	Connectors

### GLOW FLEX SB-1207



Dimension (mm) :



Order Code : Glow Flex\_SB\_1207\_20\_80\_O\_27\_DC



FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	SUPPLY
Glow Flex	SB- Side Bend	1207	6- 6W (330lm) 10- 10W (550lm) 15- 15W (836lm) 19- 19W (1060lm)	80 - 80 CRI	0 - 120°	27 - 2700K 30 - 3000K 40 - 4000K	DC - 24V DC



### GLOW FLEX SB-1212



Dimension (mm) :



Order Code : Glow Flex\_SB\_1212\_20\_80\_O\_27\_DC

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	SUPPLY
Glow Flex	SV- Side Bend	1212	6- 6W (330lm) 10- 10W (550lm) 15- 15W (836lm) 19- 19W (1060lm)	80 - 80 CRI	0 - 120°	27 - 2700K 30 - 3000K 40 - 4000K	DC - 24V DC









## FEATURES

- Weatherproof and UV-resistant Plexiglass encapsulated narrow continuous LED line, Suitable for architectural illumination.
- Designed to last in extremely harsh environments.
- Frameless housing ensures seamless transition to light-emitting surface.
- Latest technological developments in light diffusion, and offers exceptional diffusion characteristics combined with tremendous light transmission.
- With a transition to LED light sources, this product offers optimum optical performance without sacrificing light transmission.
- Designed specifically to enhance virtually any environment.
- Extruded Aluminium With Anodized Housing.

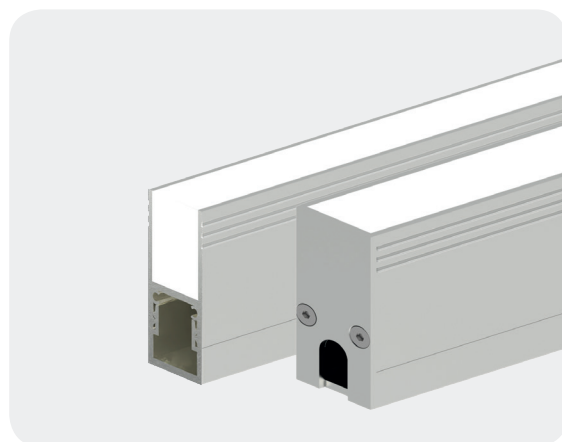


## OPTICS




Diffused




## Cable Output




Cable from side




Cable From Bottom

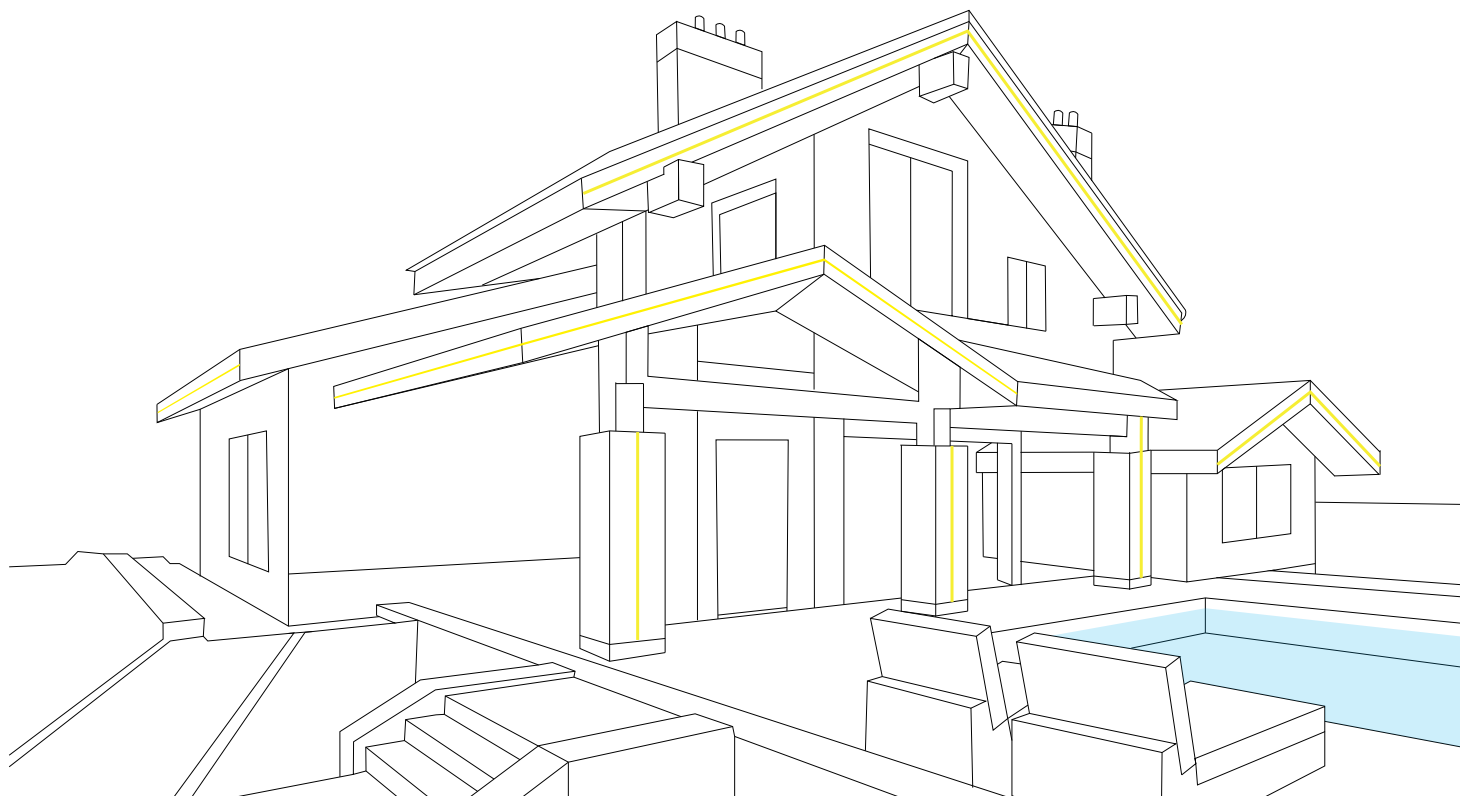

ALULINE IP

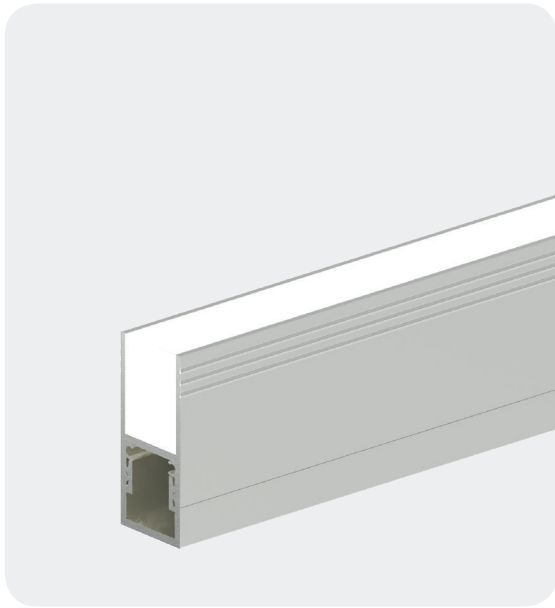

Dimension (mm) :

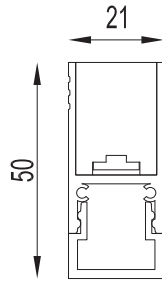


Accessories




Bracket



End Cap

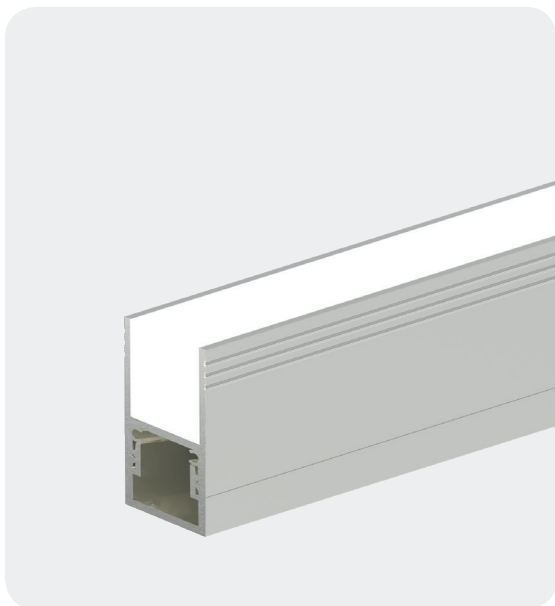

Dimension (mm) :

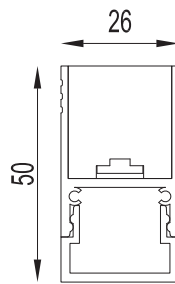

Accessories



Bracket



End Cap

Order Code : Aluline\_DV\_2145\_1000\_80\_O\_27\_SA\_CC\_BR


Custom Length Available in Multiple of 50mm

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	Accessories
Aluline	DV	2145	500mm (5W) 1000mm (10W) (450lm/M)	80 - 80 CRI	0 - 120°	27- 2700K 30 - 3000K 40 - 4000K 60 - 6000K	SA- Silver Anodized	CC- Constant Voltage	EC- End Caps BR- Bracket
Aluline	DV	2645	500mm (7.5W) 1000mm (15W) (700lm/M)	80 - 80 CRI	0 - 120°	27- 2700K 30 - 3000K 40 - 4000K 60 - 6000K	SA- Silver Anodized	CC- Constant Voltage	EC- End Caps BR- Bracket




## FEATURES


- Family Of Ceiling Mounted, Ceiling Recessed, Wall Mounted & Suspension
- Modular System With Diffuser Opal & Prismatic , Downlight & Deep Recessed.
- Opal & Prismatic Diffuser
- Easy Driver & Lamp Replacement
- Blind Plate, Smoke Detector, Sensor Can Be Installed In Profile System
- Dimmable Options.
- Large Grids Possible
- Downlight & Up-down lighting
- Trim
- UGR , 19
- Visual Comfort
- Easy Maintenance
- Endless / Limitless Diffuser Option
- Multiple Wattage 20w Per Metre To 40w Per Metre
- Custom Shapes And Sizes Available
- Various Colour Temperatures 3000k to 6000k. (More options available on on Request.)
- Custom Colour Available
- Easy Connect

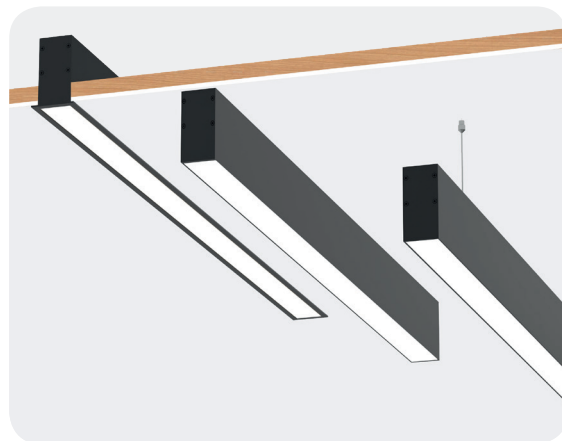


## OPTICS

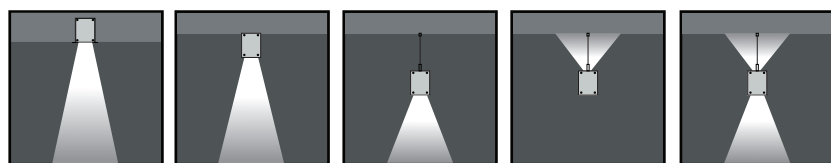


Recessed      Surface      Pendant- Direct      Pendant- Indirect      Pendant- Direct & Indirect

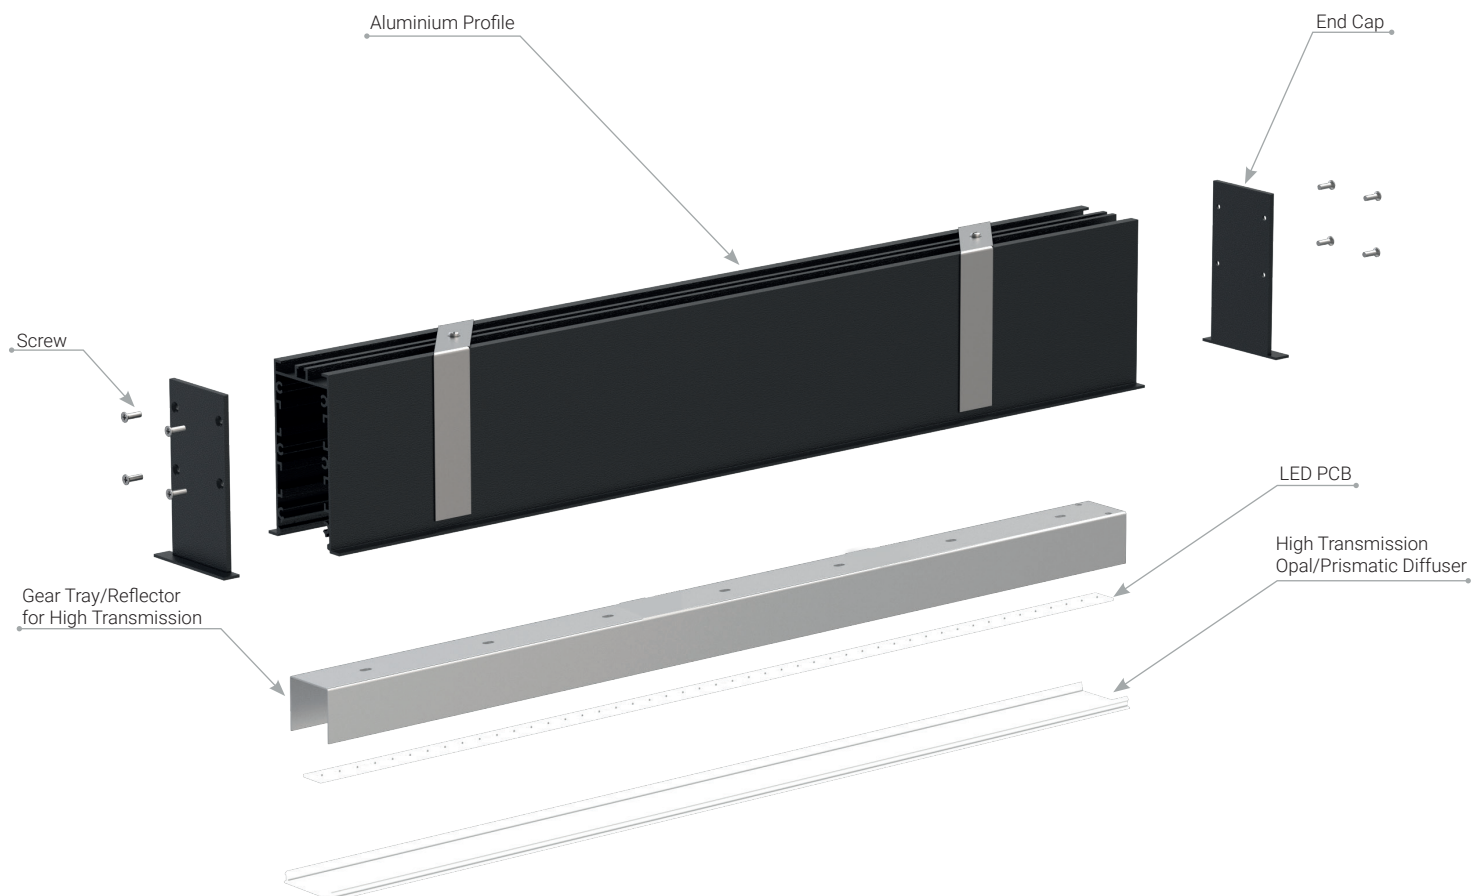

### ALULINE DEEP CR 4472

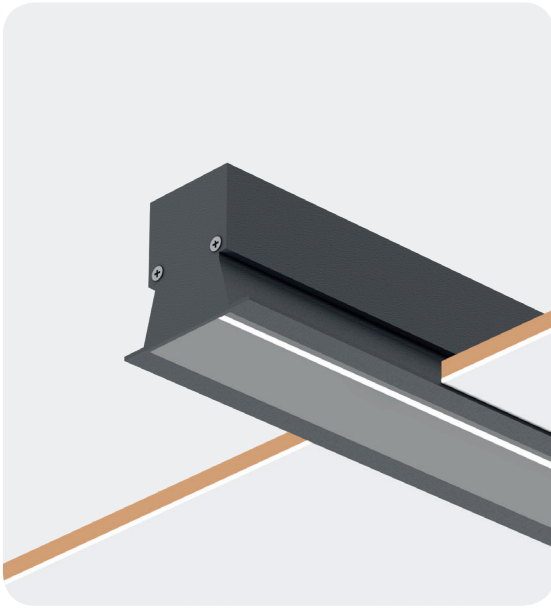

Dimension (mm):




Order Code : Aluline\_Deep\_CR\_4472\_2272\_72\_8640\_80\_40\_BK\_ND\_OP

Custom Length in Multiple of 280mm Max Upto 3385mm.


FAMILY	TYPE	CODE	LENGTH	WATTAGE /M	LUMEN/M	CRI	CCT	FINISH	SUPPLY	Diffuser
Aluline Deep	CR	4472	580mm	9W/14W/18W	1080lm/1680lm/2160lm	80	30 - 3000K	BK - Black WH - White SI - Silver CC- Custom Color	ND - Non Dim AL - 1 to 10 DA - DALI	OP - Opal PR - Prismatic
			1142mm	18W/27W/36W	2160lm/3240lm/4320lm		40 - 4000K			
			1708mm	27W/42W/54W	3240lm/4800lm/6480lm		60 - 6000K			
			2272mm	36W/56W/72W	4320lm/6720lm/8640lm					



### ALULINE CR 6195

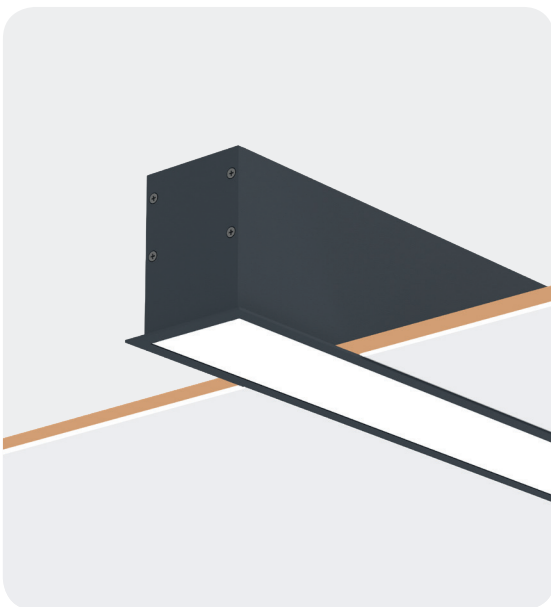

Dimension (mm):





Order Code : Aluline\_CR\_6195\_2272\_72\_8640\_80\_40\_BK\_ND\_OP

Custom Length in Multiple of 280mm Max Upto 3385mm.

FAMILY	TYPE	CODE	LENGTH	WATTAGE /M	LUMEN/M	CRI	CCT	FINISH	SUPPLY	Diffuser
Aluline	CR	6195	580mm	9W/14W/18W	1080lm/1680lm/2160lm	80	30 - 3000K	BK - Black WH - White SI - Silver CC- Custom Color	ND - Non Dim AL - 1 to 10 DA - DALI	OP - Opal PR - Prismatic
			1142mm	18W/27W/36W	2160lm/3240lm/4320lm		40 - 4000K			
			1708mm	27W/40W/54W	3240lm/4800lm/6480lm		60 - 6000K			
			2272mm	36W/54W/72W	4320lm/6720lm/8640lm					



ALULINE CR 7995

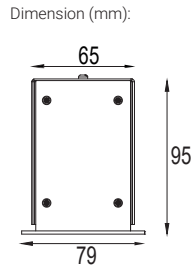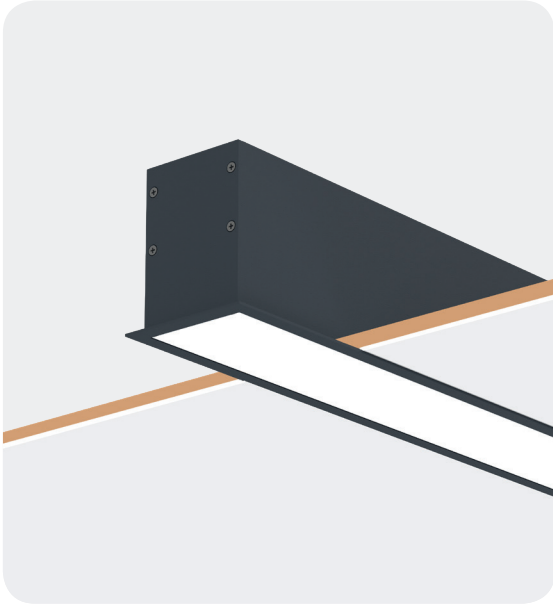


Order Code : Aluline\_CR\_7995\_2272\_72\_8640\_80\_40\_BK\_ND\_OP

Custom Length in Multiple of 280mm Max Upto 3385mm.

FAMILY	TYPE	CODE	LENGTH	WATTAGE /M	LUMEN/M	CRI	CCT	FINISH	SUPPLY	Diffuser
Aluline	CR	7995	580mm	9W/14W/18W	1080lm/1680lm/2160lm	80	30 - 3000K	BK - Black WH - White SI - Silver CC- Custom Color	ND - Non Dim AL - 1 to 10 DA - DALI	OP - Opal PR - Prismatic
			1142mm	18W/27W/36W	2160lm/3240lm/4320lm		40 - 4000K			
			1708mm	27W/40W/54W	3240lm/4800lm/6480lm		60 - 6000K			
			2272mm	36W/54W/72W	4320lm/6720lm/8640lm					



ALULINE CP 4795

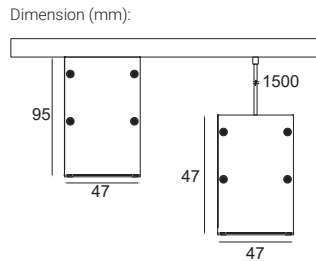

Order Code : Aluline\_CP/CS\_4795\_2262\_72\_8640\_80\_40\_BK\_ND\_OP

Custom Length in Multiple of 270mm Max Upto 3375mm.


FAMILY	TYPE	CODE	LENGTH	WATTAGE /M	LUMEN/M	CRI	CCT	FINISH	SUPPLY	Diffuser
Aluline	CP CS	4795	570mm	9W/14W/18W	1080lm/1680lm/2160lm	80	30 - 3000K	BK - Black WH - White SI - Silver CC- Custom Color	ND - Non Dim AL - 1 to 10 DA - DALI	OP - Opal PR - Prismatic
			1134mm	18W/27W/36W	2160lm/3240lm/4320lm		40 - 4000K			
			1698mm	27W/40W/54W	3240lm/4800lm/6480lm		60 - 6000K			
			2262mm	36W/54W/72W	4320lm/6720lm/8640lm					



ALULINE CP 6595



Dimension (mm):

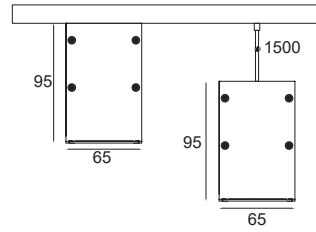

Order Code : Aluline\_CP/CS\_6595\_2260\_72\_8640\_80\_40\_BK\_ND\_OP


Custom Length in Multiple of 270mm Max Upto 3375mm.

FAMILY	TYPE	CODE	LENGTH	WATTAGE /M	LUMEN/M	CRI	CCT	FINISH	SUPPLY	Diffuser
Aluline	CP	6595	570mm	9W/14W/18W	1080lm/1680lm/2160lm	80	30 - 3000K	BK - Black WH - White SI - Silver CC- Custom Color	ND - Non Dim AL - 1 to 10 DA - DALI	OP - Opal PR - Prismatic
	CS		1134mm	18W/27W/36W	2160lm/3240lm/4320lm		40 - 4000K			
			1698mm	27W/40W/54W	3240lm/4800lm/6480lm		60 - 6000K			
			2262mm	36W/54W/72W	4320lm/6720lm/8640lm					





IIM, Ahmedabad

ALULINE CR 6195

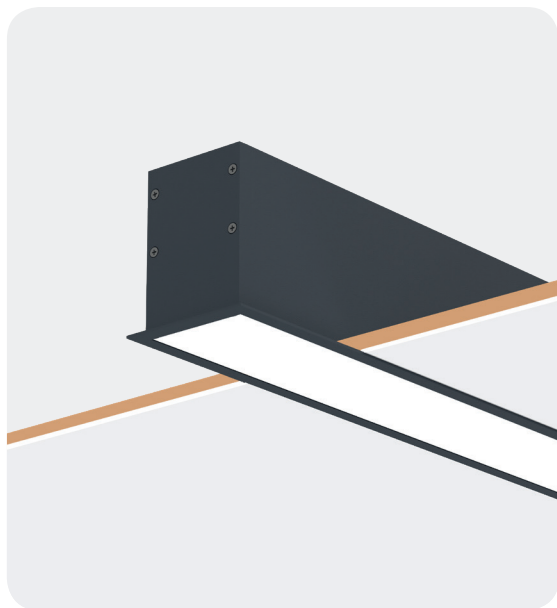

Dimension (mm):



Order Code : Aluline\_CR\_6195\_280\_5\_600\_80\_40\_BK\_ND\_OP

Custom Length in Multiple of 280mm Max Upto 3385mm.



FAMILY	TYPE	CODE	LENGTH	WATTAGE	LUMEN	CRI	CCT	FINISH	SUPPLY	Diffuser
Aluline	CR	6195 7995	280mm	5W/7W/9W	600lm/840lm/1080lm	80	30 - 3000K 40 - 4000K 60 - 6000K	BK - Black WH - White SI - Silver CC- Custom Color	ND - Non Dim AL - 1 to 10 DA - DALI	OP - Opal PR - Prismatic BLS- Blinds
			564mm	9W/14W/18W	1080lm/1680lm/2160lm					
			847mm	14W/21W/27W	1680lm/2520lm/3240lm					
			1128mm	18W/27W/36W	2160lm/3240lm/5400lm					
			1411mm	23W/34W/45W	2760lm/4080lm/5400lm					
			1692mm	27W/42W/54W	3240lm/4000lm/6480lm					
			1975mm	32W/56W/72W	3840lm/5880lm/7560lm					
2256mm	36W/56W/72W	4320lm/6720lm/8640lm								

Accessories

CR L



Dimension (mm):

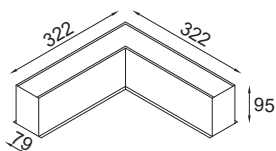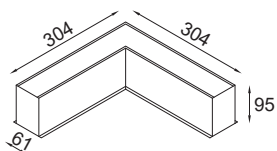

Order Code : Aluline\_CR-L\_6195\_9\_1080\_80\_40\_BK\_ND\_OP



FAMILY	TYPE	CODE	LENGTH (mm)	WATTAGE	LUMEN	CRI	CCT	FINISH	SUPPLY	Diffuser
Aluline	CR-L	6195 7995	304 x 304	9W/14W/18W	1080lm/1680lm/2160lm	80	30 - 3000K 40 - 4000K 60 - 6000K	BK - Black WH - White SI - Silver CC- Custom Color	ND - Non Dim AL - 1 to 10 DA - DALI	OP - Opal PR - Prismatic BL- Blinds L
			322 x 322							



CR PLUS



Dimension (mm):

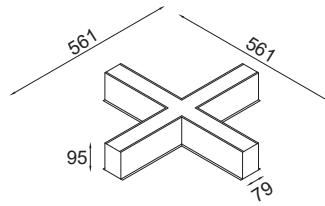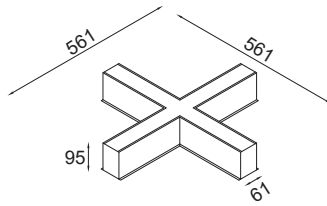



Order Code : Aluline\_CR-Plus\_6195\_18\_2160\_80\_40\_BK\_ND\_OP

FAMILY	TYPE	CODE	LENGTH (mm)	WATTAGE	LUMEN	CRI	CCT	FINISH	SUPPLY	Diffuser
Aluline	CR-Plus	6195 7995	561 x 561	18W/27W/36W	2160lm/3240lm/4320lm	80	30 - 3000K 40 - 4000K 60 - 6000K	BK - Black	ND - Non Dim AL - 1 to 10 DA - DALI	OP - Opal PR - Prismatic BP- Blinds Plus
								WH - White		
								SI - Silver CC- Custom Color		

CR Y



Dimension (mm):





Order Code : Aluline\_CR-Y\_6195\_14\_1680\_80\_40\_BK\_ND\_OP

FAMILY	TYPE	CODE	LENGTH (mm)	WATTAGE	LUMEN	CRI	CCT	FINISH	SUPPLY	Diffuser
Aluline	CR-Y	6195 7995	543 x 470	14W/21W/27W	1680lm/2520lm/3240lm	80	30 - 3000K 40 - 4000K 60 - 6000K	BK - Black	ND - Non Dim AL - 1 to 10 DA - DALI	OP - Opal PR - Prismatic BY- Blinds Y
								WH - White		
								SI - Silver CC- Custom Color		

CR T




Dimension (mm):

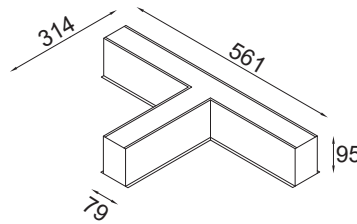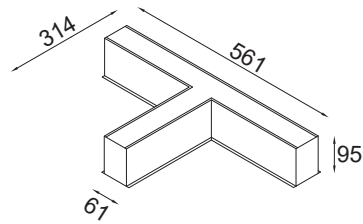

Order Code : Aluline\_CR-T\_6195\_14\_1680\_80\_40\_BK\_ND\_OP

FAMILY	TYPE	CODE	LENGTH (mm)	WATTAGE	LUMEN	CRI	CCT	FINISH	SUPPLY	Diffuser
Aluline	CR-T	6195 7995	304 x 304 314 x 314	14W/21W/27W	1680lm/2520lm/3240lm	80	30 - 3000K 40 - 4000K 60 - 6000K	BK - Black	ND - Non Dim AL - 1 to 10 DA - DALI	OP - Opal PR - Prismatic BT- Blinds T
								WH - White		
								SI - Silver CC- Custom Color		

Profile Jointer (included)




Mounting Clips (included)



End Cap (Excluded)



Blinds

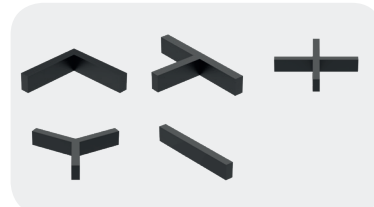


End Cap To Be Ordered Separately.

**ALULINE CP 4795**



Dimension (mm):

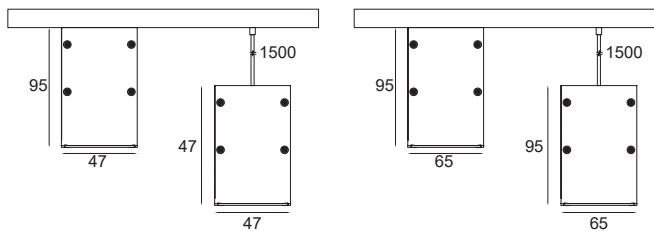

Order Code : Aluline\_CP\_4795\_280\_5\_600\_80\_40\_BK\_ND\_OP


Custom Length in Multiple of 280mm Max Upto 3385mm.

FAMILY	TYPE	CODE	LENGTH	WATTAGE	LUMEN	CRI	CCT	FINISH	SUPPLY	Diffuser	
Aluline	CP	4795	280mm	5W/7W/9W	600lm/840lm/1080lm	80	30 - 3000K 40 - 4000K 60 - 6000K	BK - Black WH - White SI - Silver CC- Custom Color	ND - Non Dim AL - 1 to 10 DA - DALI	OP - Opal PR - Prismatic BLS- Blinds	
			564mm	9W/14W/18W	1080lm/1680lm/2160lm						
	CS	6595	847mm	14W/21W/27W	1680lm/2520lm/3240lm						
			1128mm	18W/27W/36W	2160lm/3240lm/5400lm						
			1411mm	23W/34W/45W	2760lm/4080lm/5400lm						
				1692mm	27W/42W/54W						3240lm/4000lm/6480lm
				1975mm	32W/56W/72W						3840lm/5880lm/7560lm
			2256mm	36W/56W/72W	4320lm/6720lm/8640lm						

**Accessories**

CP/CS L

Dimension (mm):

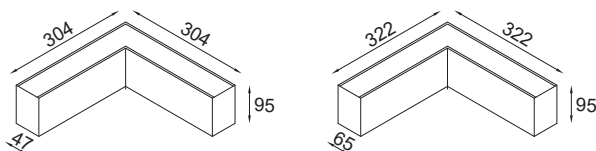



Order Code : Aluline\_CP-L\_6195\_9\_1080\_80\_40\_BK\_ND\_OP

FAMILY	TYPE	CODE	LENGTH (mm)	WATTAGE	LUMEN	CRI	CCT	FINISH	SUPPLY	Diffuser
Aluline	CP-L	6195	304 x 304	9W/14W/18W	1080lm/1680lm/2160lm	80	30 - 3000K 40 - 4000K 60 - 6000K	BK - Black WH - White SI - Silver CC- Custom Color	ND - Non Dim AL - 1 to 10 DA - DALI	OP - Opal PR - Prismatic BL - Blinds L
			CS-L							

CP/CS PLUS



Dimension (mm):

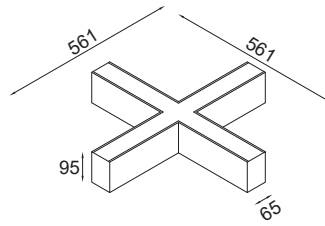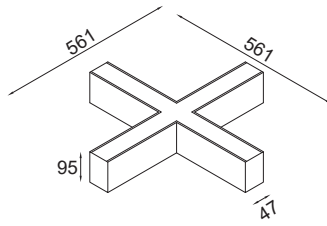



Order Code : Aluline\_CP-Plus\_6195\_18\_2160\_80\_40\_BK\_ND\_OP

FAMILY	TYPE	CODE	LENGTH (mm)	WATTAGE	LUMEN	CRI	CCT	FINISH	SUPPLY	Diffuser
Aluline	CP-Plus	6195	561 x 561	18W/27W/36W	2160lm/3240lm/4320lm	80	30 - 3000K 40 - 4000K 60 - 6000K	BK - Black	ND- Non Dim AL- 1 to 10 DA- DALI	OP- Opal PR- Prismatic BP- Blinds Plus
	CS- Plus	7995						WH - White		
								SI - Silver CC- Custom Color		

CP/CS Y



Dimension (mm):





Order Code : Aluline\_CP-Y\_6195\_14\_1680\_80\_40\_BK\_ND\_OP

FAMILY	TYPE	CODE	LENGTH (mm)	WATTAGE	LUMEN	CRI	CCT	FINISH	SUPPLY	Diffuser
Aluline	CP-Y	6195	543 x 470	14W/21W/27W	1680lm/2520lm/3240lm	80	30 - 3000K 40 - 4000K 60 - 6000K	BK - Black	ND - Non Dim AL - 1 to 10 DA - DALI	OP - Opal PR - Prismatic BY- Blinds Y
	CS-Y	7995						WH - White		
								SI - Silver CC- Custom Color		

CP/CS T




Dimension (mm):

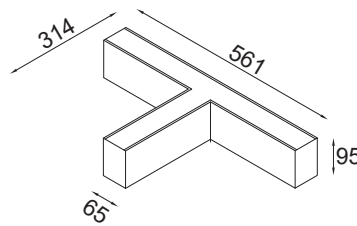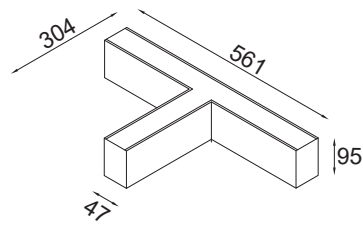

Order Code : Aluline\_CP-T\_6195\_14\_1680\_80\_40\_BK\_ND\_OP

FAMILY	TYPE	CODE	LENGTH (mm)	WATTAGE	LUMEN	CRI	CCT	FINISH	SUPPLY	Diffuser
Aluline	CP-T	6195	304 x 561 314 x 561	14W/21W/27W	1680lm/2520lm/3240lm	80	30 - 3000K 40 - 4000K 60 - 6000K	BK - Black	ND - Non Dim AL - 1 to 10 DA - DALI	OP - Opal PR - Prismatic BT- Blinds T
	CS-T	7995						WH - White		
								SI - Silver CC- Custom Color		

Profile Jointer (included)



Aircraft Cable (Excluded)



End Cap (Excluded)




Blinds




Aircraft Cable & End Cap To Be Ordered Separately.



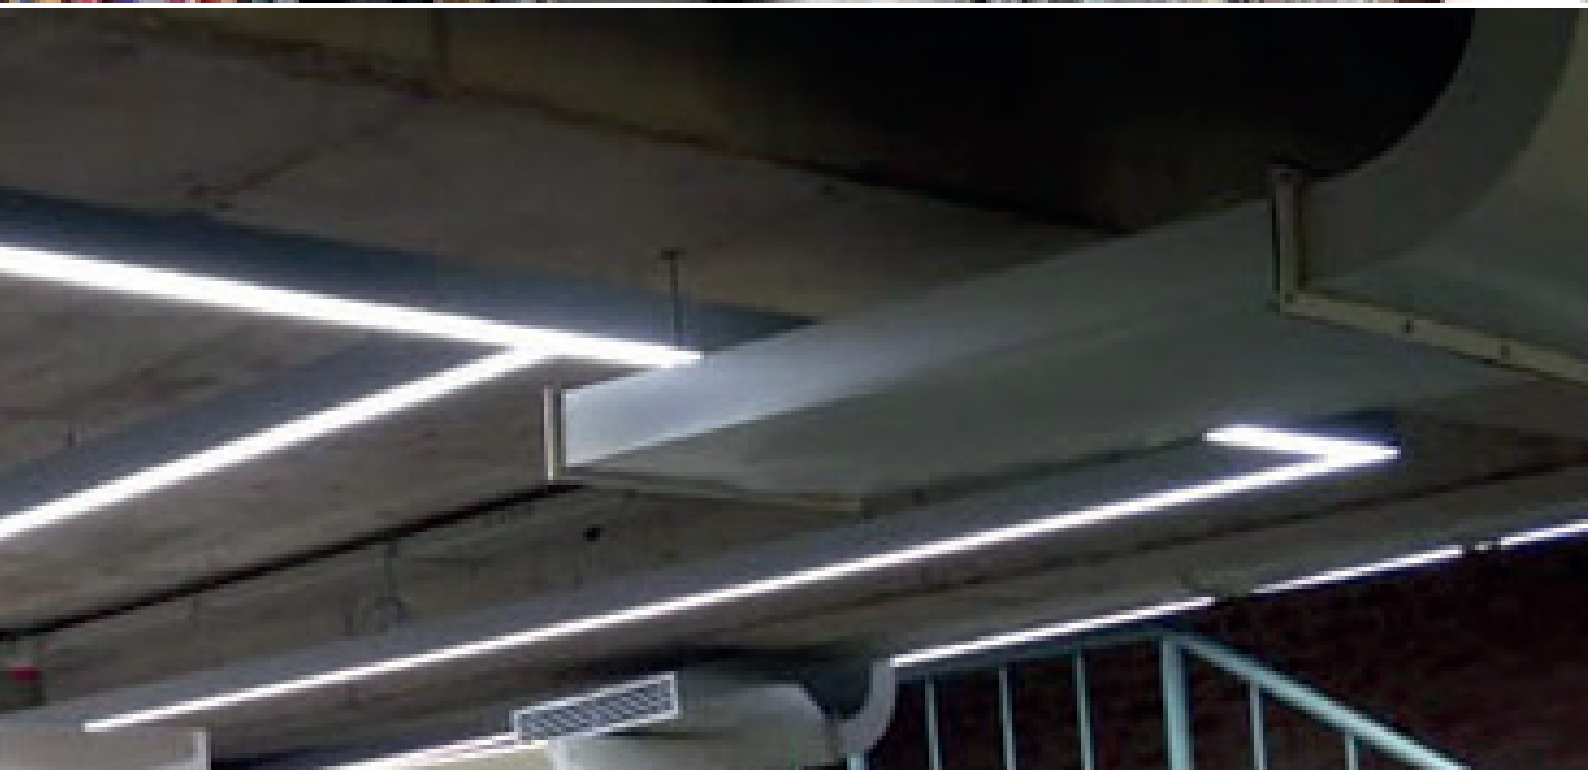


## FEATURES

- The Attractive Arrangements Of Different Shapes Creates Interesting Patterns Combining The Ceiling Surface Mounted And Pendant From Various Color Temperatures And Finishes In Different Sizes For Homogeneous Illumination With Opal Diffuser.
- Aluminium Extrusion Housing.
- Powder Coating.
- High Quality LEDs
- Energy Efficient.
- SMD LED 50000\* Hrs Life.
- Professional Designed Optical System To Achieve Optimum Light Efficiency.

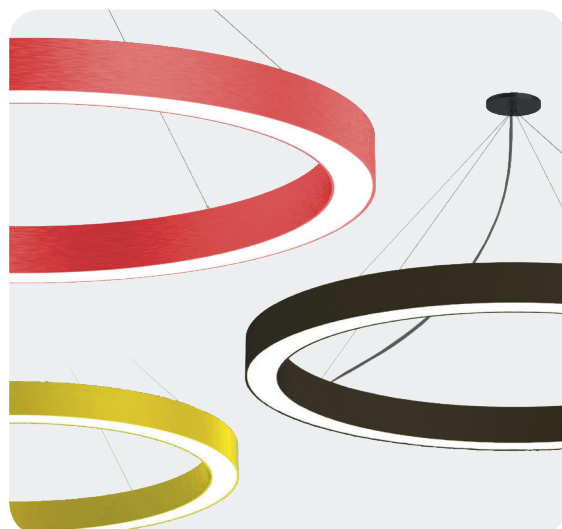

## OPTICS

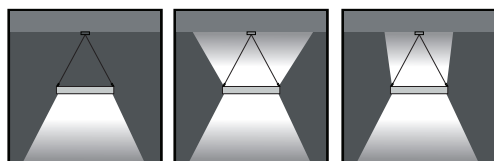

Diffused  
Ring / Moon / Arc

Diffused  
Ring / Arc


Diffused  
Ring



RING



Dimension (mm):

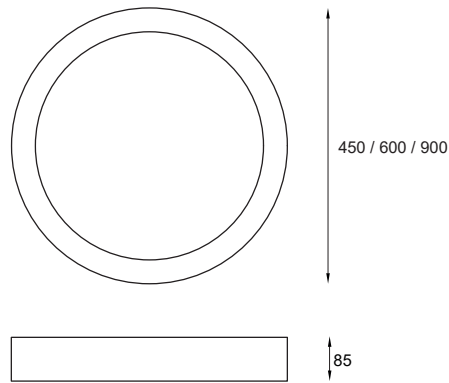

Order Code : Ring\_CS\_45\_22\_08\_DF\_30\_BK\_230

Custom Size upto 4000mm Dia & Custom Finish Available.


FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY
Ring	CS CP	45 - 450mm	22W (2310lm)	08 - 80 CRI	DF - Diffused	27- 2700K	BK - Black WH - White SI - Silver	230V - 230V AC
		60 - 600mm	30W (3150lm)			30 - 3000K		
		90 - 900mm	42W (4410lm)			40 - 4000K 60- 6000K		



MOON



Dimension (mm):

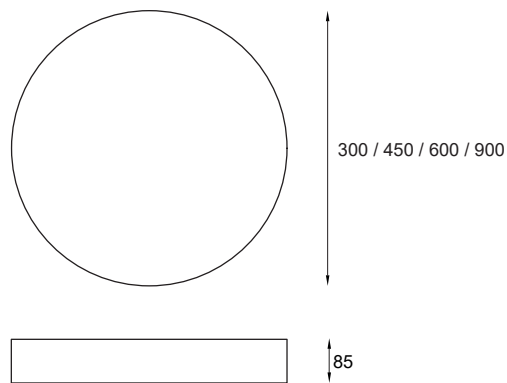


Order Code : Moon\_CS\_30\_30\_80\_DF\_30\_BK\_230

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY
Moon	CS CP	30- 300mm	30W (3150lm)	80 - 80 CRI	DF - Diffused	27- 2700K	BK - Black WH - White SI - Silver	230V - 230V AC
		45 - 450mm	40W (4200lm)			30 - 3000K		
		60 - 600mm	60W (6300lm)			40 - 4000K		
		90 - 900mm	80W (8400lm)			60- 6000K		



ARC

Dimension (mm):

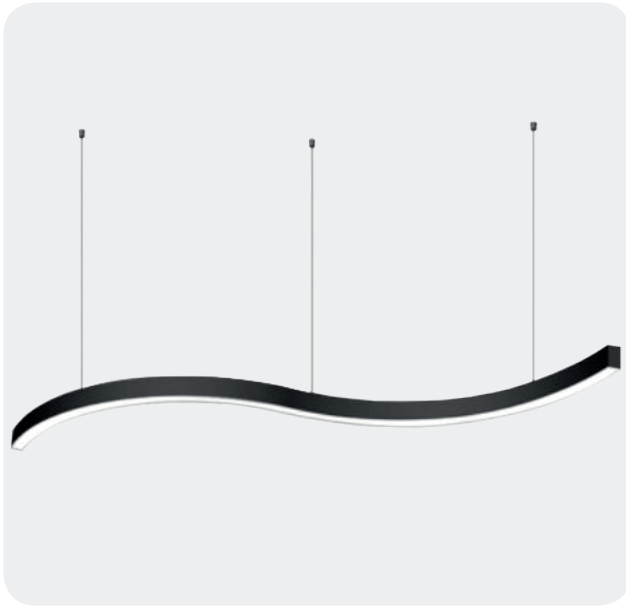

Order Code : ARC\_CP\_60\_15\_8\_DF\_30\_BK\_230

Custom Size upto 3000mm & Custom Finish Available.

FAMILY	TYPE	CODE	WATTAGE & (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY
Arc	CP	60- 600mm	15W/M (105lm/W)	8 - 80 CRI	DF - Diffused	27- 2700K	BK - Black WH - White SI - Silver	230V - 230V AC
	CS	80- 800mm				30 - 3000K		
		120- 1200mm				40 - 4000K		
		150- 1500mm				60- 6000K		



Custom Made 4000mm Ring- Asymmetric Upside  
Maker Maxity, BKC - Mumbai






RKLITE

Since 1961



## FEATURES


- Copper Body.
- Extra Safety Impact Resistant, Toughened Glass.
- High Efficiency Optical System.
- Extra Clear Glass To Increase Efficiency Of The Fixture.
- "Duracoat" Painting.
- "Long Life" Thermal Management.

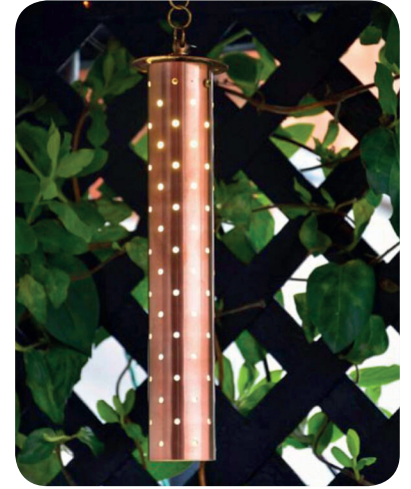

## COPP WM



Dimension (mm) :



Accessories

Order Code : Copp\_WM\_54\_6\_80\_M\_27\_GG\_230


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Copp	WM	54	6 - 6W (630lm)	80 - 80 CRI	M - 24° W - 40°	27 - 2700K 30 - 3000K 40 - 4000K	CO - Copper	230 - 230vAC	-



## COPP WM UD



Dimension (mm) :




Accessories

Order Code : Copp\_WM\_54-UD\_12\_80\_M\_W\_CO\_230


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS UP-DOWN	CCT	FINISH	SUPPLY	ACCESSORIES	
Copp	WM	54-UD	12W - 6W+6W (1260lm)	80 - 80 CRI	M - 24° W - 40°	M - 24° W - 40°	27 - 2700K 30 - 3000K 40 - 4000K	CO - Copper	230 - 230vAC	-



## COPP WM ADJ



Dimension (mm) :

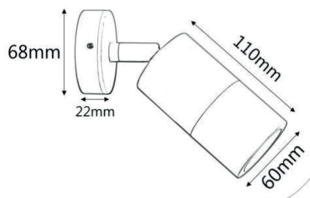

Accessories

Order Code : Copp\_WM ADJ\_54\_8\_80\_27\_CO\_230


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Copp	WM ADJ	54	6 - 6W (630lm)	80 - 80 CRI	M - 24° W - 40°	27 - 2700K 30 - 3000K 40 - 4000K	CO - Copper	230 - 230vAC	-



COPP PD



Dimension (mm) :

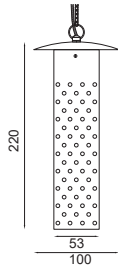


Accessories

Order Code : Copp\_PD\_54\_8\_80\_27\_CO\_230


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Copp	PD	54	8 - 8W (840lm)	80 - 80 CRI	-	27 - 2700K 30 - 3000K 40 - 4000K	CO - Copper	230 - 230vAC	-



COPP LANTERN



Dimension (mm) :



Accessories

Order Code : Copper\_Lantern\_600\_9\_80\_27\_CO\_230

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Copp	Lantern	600	9 - 9W (945lm)	80 - 80 CRI	-	27 - 2700K 30 - 3000K 40 - 4000K	CO - Copper BK- Black	230 - 230vAC	-





# RKLITE

*Since 1961*

**Indoor / Outdoor & Decorative**





## FEATURES

- Stainless Steel 316 Marine Grade Body.
- Extra Safety Impact Resistant, Toughened Glass.
- Extra Clear Glass To Increase Efficiency of The Fixture.
- High Grade Brass Nickel Plated IP68 German Gland
- High Grade Neoprene Silicon Based Italian Cable to Withstand Any Weather Conditions.
- Best In Class Thermal Management.
- High Efficiency Optical System.
- Multiple Accessories Support
- Cree LED 50000\* hrs Life
- Recessed Housing Made Of ABS.
- "Capillary Protect System" Anti-Capillary System To Protect Any Water Ingress From Cable Joints.
- "Long Life" Thermal Management.
- Automatic Cutoff at 75°C
- We Suggest Epoxy Potting Instead Of Ip68 Connectors. For Underwater Lighting Installation
- Installation upto 1 Meter Depth.
- Parts Are Replaceable




## OPTICS

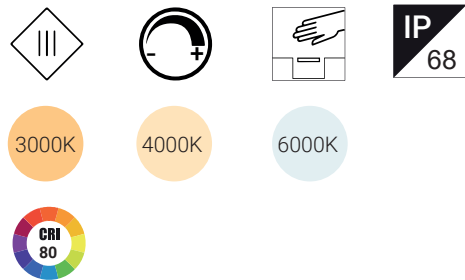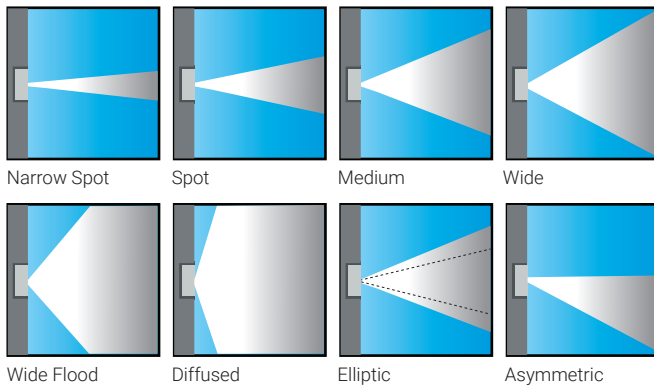

Reference Product Image

### Aqua 55 S

Dimension (mm) :

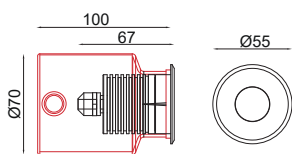

Accessories



RH - 55 - S  
(Recessed Housing)




Order Code : Aqua\_Recessed\_55 S\_2\_80\_NS\_30\_SS\_CC

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Aqua	Recessed	55 S	1 - 1W (126lm) 1.5 - 1.5W (180lm) 2 - 2W (252lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 40° WF - 60° EL - 30 x 65° DF - Diffused AS - Asymmetric	30 - 3000K 40 - 4000K 60 - 6000K	SS- Stainless Steel	CC - Constant Current 350mA/500mA/700mA	-




### Aqua 55 L

Dimension (mm) :

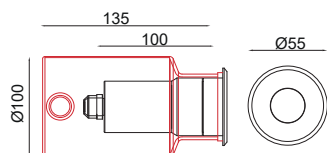

Accessories



RH - 55 - L  
(Recessed Housing)




Order Code : Aqua\_Recessed\_55 L\_2\_80\_NS\_30\_SS\_CC

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Aqua	Recessed	55 L	2 - 2.5 (350lm) 3 - 3W (252lm) 5 - 5.5W (770lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 40° WF - 60° EL - 30 x 65° DF - Diffused AS - Asymmetric	30 - 3000K 40 - 4000K 60 - 6000K	SS- Stainless Steel	CC - Constant Current 500mA/700mA/ 400mA CV - Constant Voltage 24V	-



### Aqua 125

Dimension (mm) :

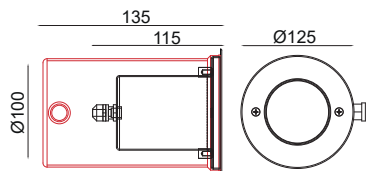

Accessories



RH - 125  
(Recessed Housing)




Order Code : Aqua\_Recessed\_125\_6\_80\_NS\_30\_SS\_CC

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Aqua	Recessed	125	6 - 6W (720lm) 12 - 12W (1440lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° SP - 18° WF - 54° DF - Diffused	30 - 3000K 40 - 4000K 60 - 6000K	SS- Stainless Steel	CC - Constant Current 700mA/ 300mA CV - Constant Voltage 24V	-



### Aqua 41

Dimension (mm) :




Order Code : Aqua\_Surface\_41\_2\_80\_NS\_30\_SS\_CC

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Aqua	Surface	41	2 - 2.5 (350lm) 3 - 3W (252lm) 5 - 5.5W (770lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 40° WF - 60° DF - Diffused	30 - 3000K 40 - 4000K 60 - 6000K	SS- Stainless Steel	CC - Constant Current 500mA/700mA/400mA CV - Constant Voltage 24V	-



### Aqua 100

Dimension (mm) :



Order Code : Aqua\_Surface\_100\_6\_80\_NS\_30\_SS\_CC

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
Aqua	Surface	100	6 - 6W (720lm) 12 - 12W (1440lm)	80 - 80 CRI 90 - 90 CRI (on Request*)	NS - 10° M - 24° W - 40° WF - 60° DF - Diffused	30 - 3000K 40 - 4000K 60 - 6000K	SS- Stainless Steel	CC - Constant Current 700mA/300mA CV - Constant Voltage 24V	-



Reference Product Image





Reference Product Image

The IP Code (or Ingress Protection Rating, sometimes also interpreted as International Protection Rating) consists of the letters IP followed by two digits.

## First Numeral

Protection against the ingress of solid particles

IP    

## Second Numeral

















Protection against the harmful ingress of water

IP	Requirements	Example	Protection of persons against access to hazardous parts with:	IP	Requirement	Example	Protection from water
0	No protection		Non-protected	0	No protection		Non-protected
1	Full penetration of 50mm diameter sphere not allowed. Contact with hazardous parts not permitted.		Back of hand	1	Protected against vertically falling drops of water. Limited ingress permitted.		Vertically dripping
2	Full penetration of 12.5mm diameter sphere not allowed. The jointed test finger shall have adequate clearance from hazardous parts.		Finger	2	Protected against vertically falling drops of water with the enclosure tilted 15° from the vertical. Limited ingress permitted.		Dripping up to 15° from the vertical
3	The access probe of 2.5mm diameter shall not penetrate.		Tool	3	Protected against sprays to 60° from the vertical. Limited ingress permitted.		Limited spraying
4	The access probe of 1.0mm diameter shall not penetrate.		Wire	4	Protected against water splashed from all directions. Limited ingress permitted.		Splashing from all directions
5	Limited ingress of dust permitted (no harmful deposit).		Wire	5	Protected against jets of water. Limited ingress permitted.		Hosing jets from all directions
6	Totally protected against the ingress of dust.		Wire	6	Protected against strong jets of water. Limited ingress permitted.		Strong hosing jets from all directions
				7	Protected against the effects of immersion between 15cm and 1m.		Temporary immersion
				8	Protected against long periods of immersion under pressure.		Continuous immersion

Example :

**IP 68**

Totally protected against the ingress of dust.  
Protected against long periods of immersion under pressure.

	Class 1	<b>PT</b>	Post Top	<b>BLS</b>	Blinds
	Class 2	<b>BO</b>	Bollards	<b>BL</b>	Blind L
	Class 3	<b>ING</b>	Inground	<b>BP</b>	Blind Plus
	IP 20	<b>SL</b>	Step Light	<b>BY</b>	Blind Y
	IP 40	<b>SB</b>	Side Bend	<b>BT</b>	Blind T
	IP 67	<b>TB</b>	Top Bend	<b>NS</b>	Narrow Spot
	IP 68	<b>SS</b>	Stainless Steel	<b>M</b>	Medium
	Dimmable	<b>GG</b>	Graphite Grey	<b>W</b>	Wide
	DALI Dimmable	<b>DB</b>	Dark Black	<b>WF</b>	Wide Flood
<b>CC</b>	Constant Current	<b>MW</b>	Matt White	<b>DF</b>	Diffused
<b>CV</b>	Constant Voltage	<b>C</b>	Corten	<b>EL</b>	Eleptical
<b>R</b>	Remote Driver	<b>DLG</b>	Dark Green Leaf	<b>ASY</b>	Asymmetric
	CRI 80	<b>SI</b>	Silver	<b>UD</b>	Up Down
	CRI 90	<b>SA</b>	Silver Anodized	<b>P</b>	Patten
	Walk Over	<b>BK</b>	Black	<b>ALP</b>	Aluminum Profiles
	Drive Over	<b>WH</b>	White	<b>COB</b>	Chip on Board
	Touch Safe	<b>CO</b>	Copper	<b>HP</b>	High Power
	Diecast	<b>CC</b>	Custom Color		
	Corrosion Resistance	<b>HL</b>	Hexcell Louvre		
<b>CP</b>	Ceiling Pendant	<b>CL</b>	Cowl		
<b>CM</b>	Ceiling Mounted	<b>BR</b>	Bracket		
<b>CS</b>	Ceiling Surface	<b>CLM</b>	Clamp		
<b>CR</b>	Ceiling Recessed	<b>ABK</b>	Anchor Bolt Kit		
<b>WM</b>	Wall Mounted	<b>EC</b>	End Cap		
<b>PD</b>	Pendant	<b>OP</b>	Opal		
<b>ADJ</b>	Adjustable	<b>PR</b>	Prismatic		

**RAJKAMAL TRADING CORPORATION**

Shiv Shankar Industrial Estate -1, Building No 3, Factory No - 2, Naikpada, Waliv, Vasai (E)  
Ph : +91 9152008739 / 740 / 741. Email : sales@rklite.com. www.rklite.com